AD

TECHNICAL REPORT ECOM-2592

EFFECTIVE CLEAR SKY TEMPERATURES IN THE 8- TO 14-MICRON BAND

BY

ALBERT R. TEBO

| COPY | OF (as |
|------------|----------|
| HARD COPY | \$.3.00 |
| MICROFICHE | 9.0.75 |
| MAY | 1965 596 |



ECOM

UNITED STATES ARMY ELECTRONICS COMMAND · FORT MONMOUTH, N.J.

DDC AVAILABILITY NOTICE

Qualified requesters may obtain copies of this report from Defense Documentation Center, Cameron Station, Alexandria, Virginia 22314.

This report has been released to the Clearinghouse for Federal Scientific and Technical Information, U. S. Department of Commerce, Springfield, Virginia 22151, for sale to the general public.

Disclaimer

The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

Disposition

Destroy this report when it is no longer needed. Do not return it to the originator.

Address Change

In case of a change in address, the recipient of this report should notify U. S. Army Electronics Command, Attn: AMSEL-IO-T, Fort Monmouth, N. J.

TECHNICAL REPORT ECOM-2592

EFFECTIVE CLEAR SKY TEMPERATURES IN THE 8- TO 14-MICRON BAND

by

Albert R. Tebo

Meteorological Division EW/Meteorological Department

May 1965

DA Task Nr. 1VO-14501-B-53A-13

U. S. ARMY ELECTRONICS LABORATORIES
U. S. ARMY ELECTRONICS COMMAND
FORT MONMOUTH, N. J.

ABSTRACT

12.00 m

ŧ

1. A. A.

'n.

Apparent sky temperatures were measured on clear days and nights during a period in July and August of 1964 at Flagstaff, Arizona. A portable radiometer, with a two-degree field of view, sensing in the wavelength band 8 to 14 microns, was used to read sky temperatures at 5-degree intervals of zenith distances (angles) from the zenith to the horizon. These values were converted to radiances and summed over the whole sky, to arrive at effective whole-sky temperatures.

The apparent sky temperature at any zenith distance is not dependent on azimuth, but does vary with the time of day. The elevation scan of temperatures at a given time is duplicated by that of an equally clear sky at a different time if the zenith temperatures are the same. The effective whole-sky temperature is consistently the same value as the apparent sky temperature at a zenith distance of 54 degrees. Mathematical equations were developed empirically to express the dependence of radiance or apparent sky temperature on zenith distance.

Graphs of the spectral radiance of the clear zenith sky, obtained from a report by Ohio State University Research Foundation, were integrated over the band 8 to 14 microns to arrive at apparent zenith temperatures for locations at altitudes from sea level to 14,000 feet. These ranged from -21°C to -82°C.

3

CONTENTS

| ABS: | TRACT | ii |
|-------------------|--|-----------------------|
| INT | RODUCTION | 1 |
| DIS | CUSSION | 1 |
| · • | Instrumentation and Techniques of Measurement Analysis of Data Development of a Mathematical Approximation Effective Whole-Sky Temperatures | 1 2 7 13 |
| SUM | MARY | 14 |
| REF | ERENCES | 15 |
| | TABLES | |
| 1. | Effective Whole-Sky Temperatures and Apparent Zenith Temperatures of Clear Skies in the 8- to 14-Micron Band, Flagstaff, Arizona | 14 |
| 2. | Clear Zenith Sky Temperatures, Integrated from 8- to 14-Micron Spectral Curves | 5 |
| | FIGURES | |
| 1. to 23. | Apparent Sky Temperature with Infrared Thermometer | 16 to 38 |
| 24. | Apparent Sky Temperature at Zenith with Infrared Thermometer | 39 |
| 25. to 33. | Clear Zenith Sky Spectral Radiance | 40 to 48 |
| 34. and 35. | Spectral Radiance of Clear Sky | 49 and 50 |
| 36. | Geometry for Determining Radiation from the Sky that Reaches an Element of the Earth's Surface | 51. |
| 37. | Effective Whole-Sky Temperature with Infrared Thermometer | 52 |

EFFECTIVE CLEAR SKY TEMPERATURES IN THE 8- TO 14-MICRON BAND

INTRODUCTION

Company of the second s

As part of a study of environmental processes in the atmosphere, techniques and equipment are being developed to measure the surface temperature of the earth, using infrared radiometers. The accuracy of these measurements is dependent on a knowledge of the emissivity of the soil examined, within the wavelength band of the instrument (8 to 14 microns). A technique of measuring this emissivity has been devised that involves a measurement of the effective sky temperature, using the same radiometer. It was a study of this measurement that led to the work reported here.

Studies have been reported in the literature on infrared radiances of the sky and on transmission of radiation through the atmosphere, but none present the information needed here. Specifically, what was desired was a knowledge of the effective whole-sky infrared temperature, in order to determine the radiation in the 8 to 14 micron wavelength band that reaches the earth's surface.

Only clear skies were studied in order to simplify the handling of the data. The plan was to take measurements at different elevation and azimuth angles, and at different times of day and night, in order to examine these variables:

- (a) dependence of apparent infrared sky temperature on elevation angle (or its complement, zenith distance),
 - (b) dependence on azimuth,
 - (c) dependence on time of day,
 - (d) consistency, that is, repeatability, from one day to another.

The ultimate aim was to arrive at a technique of measuring quickly the effective whole-sky temperature in the infrared, so that subsequent measurements of infrared emissivity of soils could be accomplished rapidly. The work on emissivity will be reported on separately.

DISCUSSION

Instrumentation and Techniques of Measurement

The instrument used for measuring sky temperature was the portable radiation thermometer, PRT-4, made by Barnes Engineering Company. It was used because it had been chosen for the technique of infrared emissivity measurements, and compatability of data was desired to simplify the handling of computations. This instrument also happens to be convenient in that it has a light-weight sensing head (three pounds), which can be easily mounted on a tripod. It has a field of view of two degrees diameter, and it senses in the

wavelength band of 3 to 14 microns. The response time is listed as 150 milliseconds, as adapted for recorder use, and the accuracy as ±1°F, or ±0.05 microwatt/cm² irradiance.

The normal range of the instrument is 10°F to 110°F, which is equivalent to an irradiance range of 3.4 to 8.4 microwatts/cm². This range was modified internally by the user to accommodate the low temperatures expected from the sky. This modification was effective, even though the linearity was distorted. The modified instrument was calibrated by using it to read the surface temperatures of a well-stirred liquid both of a mixture of chloroform and carbon tetrachloride, cocled with dry ice. By observing the readings of this bath and of water at the same temperature above the ice point, it was found that the mixture had just about the same emissivity as water. From this fact, plus the fact that a normal reference point is the temperature of melting ice, a reliable calibration was made possible.

The portable radiation thermometer is calibrated by the manufacturer with its meter marked in degrees of temperature, on the assumption that all targets are black bodies. Since the sky is very much a non-black body, the term "apparent" sky temperature for the measurements is used in this report.

The nature of the variation of sky temperature with elevation angle, or with its complement, zenith distance, was not known, so it was decided to take readings at five-degree intervals from the zenith to the horizon. It was also decided to repeat these measurements at the four azimuth quadrants to get a picture of the variation of sky temperature with azimuth. For this purpose a precision tripod, designed as a mount for a telephotometer, was used. Angles were marked off in degrees, and easily estimable to 0.2 degree.

Measurements were made at the airport in Flagstaff, Arizona, on 27 and 28 July and 4 to 9 August 1964, during both day and night. Only clear skies were measured, except that at night it was sometimes difficult to discorn high haze and very light clouds. It is possible that several anomalous readings are attributable to these factors. The tripod was located in a clear area, so that the field of view in the NE, SE, SW, and NW directions was free from obstruction except at the horizon. The altitude of the airport is officially 7012 feet.

Analysis of Data

The data obtained from these measurements are presented in Figs. 1 through 23 as plots of apparent sky temperature versus zenith distance. As often as possible, a complete run of measurements was made at each of the four azimuth directions. The duplication of temperature values at different azimuths is indicated by circled dots on the graphs. On 9 August the sky was clear in patches, so the measurements were made at various azimuth directions from north to east instead of separate runs at each azimuth. Temperature values on all runs were recorded and plotted to the nearest $\frac{1}{2}$ °C, since the accuracy of the instrument was no better than that.

The general weather pattern at Flagstaff in July and August is a tendency for the sky to become completely clear by late evening, to remain clear through the night, to begin cloudiness in midmorning, and to become overcast

by noon. This routine prevented the taking of data on most afternoons and many mornings. A continuous sampling throughout a whole 24-hour period would be interesting, but would be difficult to obtain.

The data showed many slight variations in sky temperature values at the different azimuths, but no consistent pattern could be detected. So it is concluded that clear sky temperature in the infrared wavelengths is not dependent on azimuth.

The time required for an elevation run at one azimuth was 8 to 10 minutes, thereby requiring about one-half hour for a complete run at all four azimuths. The assumption that sky temperatures did not change appreciably during this time was validated in general by the data.

Curves were drawn through the smoothed averages of the data of all four azimuth runs. Deviations from true averages were made in order to obtain uniform, smooth curves.

These plots show clearly a consistent shape of curve, and a repeatability of value. Different plots having the same zenith temperature have almost identical curves, even if on different days. For example, the curves at 0256 and 0428 MST on 6 August, both having a zenith sky temperature of -55°C, are almost identical. The curves of 0640 on 28 July and 0845 on 5 August, both having a zenith sky temperature of -51°C, are almost identical, although separated in time by a week. Similarly, 0845 on 27 July and 1106 on 7 August, more than a week apart, are almost identical, with a zenith temperature of -45°C. This points out clearly that the thermal structure of the sky repeats itself from time to time, at least insofar as its infrared emission is concerned.

The state of the s

Table 1 lists the dates and times of all the measurements, as well as the zenith temperatures in each case. Other data in this table will be discussed later. The lowest zenith temperature was $-62\frac{1}{2}$ °C at 0600 MST on 5 August, and the highest was -34°C at 1127 on 9 August.

Figure 24 is a plot of these zenith temperatures by days and hours. It shows the warming trend during the day and the cooling trend at night, and also shows a general warming trend over the period 7 to 9 August.

Some data from reports by Ohio State University Research Foundation^{1,2,3} on work performed during 1955 to 1957 have provided the means of making comparisons of the clear zenith sky temperatures at other locations. The data were obtained by a Farrand spectrometer in the form of spectral radiance and were plotted as graphs over the wavelength band 2 to 20 microns. By integrating over the band 8 to 14 microns with a planimeter, then dividing by the fraction of total black body radiance emitted within this band, and finally converting this equivalent black-body radiance to temperature, the equivalent apparent zenith sky temperature was obtained.

Table 2 is a compilation of these results, giving sky temperatures in New Mexico, Colorado, and Florida, at altitudes from sea level to 14,000 feet. The coldest zenith temperature calculated was -82°C on Pike's Peak, Colorado, on 11 September 1956, at 0650. The warmest calculated was -21°C at Cocoa

Table 1. Effective Whole-Sky Temperatures and Apparent Zenith Temperatures of Clear Skies in the 8 to 14 micron band, Flagstaff, Arizona

| Date | Time (MST) | Zenith Temperature ^T o | Iffective Whole-Sky Temperature Teff | Zenith Distance for Sky with Same Temperature as Teff |
|------------------|-------------|---|---|--|
| (1964) | | (°C) | (°C) | (degrees) |
| July | | | | |
| 27 | 0845-0908 | - 45 | -31 | 53 2 |
| 28 | 0640 | -51 | -36 ½ | 54 |
| August | _ | | | • |
| 4 | 0630-0735 | -56 2 | -40 } | 54 |
| 4 | 0915-0935 | -47 \frac{1}{2} | -33 2 | 54 |
| 4 | 1040-1108 | -47 \$ | -34 | 53 2 |
| 5 | 0550-0615 | -62] | -45 | 54 |
| 5 | 0845-0910 | -51 | - 37 | 54 |
| 5 | 1037-1058 | -47 | - 33 | 54 |
| 5 5 5 5 | 1210-1230 | - ήή | -31 | 53 2 |
| 6 | 0040-0111 | -52] | - 37 | 54 |
| 6 6 6 . | 0256-0323 | - 55 ² | - 39 | 54 |
| 6 | 0428-0450 | - 55 | -40 | 54 |
| 6 | 0604-0613 | −53 2 | -38 ½ | 54 |
| 6-7 | 2346-0005 | ₌ 48 | -33 } | 54 |
| • | 1106-1133 | -45 | -31 | 54 |
| 7 7 7 | 1408-1416 | -45 } | - 32 | 54 |
| $\dot{7}$ | 1523 | -50 \frac{5}{2} | -37 | 54 |
| Ż | 1946-1954 | -46 2 | -32 | 55 |
| 7-8 | 2348-003.1 | -47 | -31 | 53 |
| ' 8 | 0237-02:9 | -47 } | -30½ | 55 2 |
| 8 8 8 8 | 0435-0417 | -45 2 | -30 | 54 |
| 8 | 0918-0935 | -41 | -27 | 53 2 |
| 8 | 1052-1112 | -37 2 | -24 | 522 |
| 9 | 1127 | -34 | ~21 2 | 52] |

Table 2. Clear Zenith Sky Temperatures, Integrated from 8 to 14 Micron Spectral Curves

| Reference | Location | Date | Local Time | Altitude (Feet) | Temperature (°C) |
|-----------|------------------------|-----------|--------------------|-----------------|------------------|
| ı | White Sands, N. M. | 13 Aug 55 | 1730 | 4,300 | -25 |
| ī | Sacramento Peak, N. M. | 21 Aug 55 | 0010 | 9,000 | -47 |
| ì | Climax, Colo. | 30 Aug 55 | 1720 | 11,200 | -69 |
| ī | Denver, Colo. | 5 Sep 55 | 1205 | 5,300 | -51 |
| 2 | Pike's Peak, Colo. | 10 Sep 56 | 1552 | 14,110 | -77 |
| 2 | 11 11 11 | 11 Sep 56 | 0650 | 11 | -82 |
| 2 | 11 11 11 | 12 Sep 56 | 1440 | 11 | - 59 |
| 2 | 11 11 11 | 14 Sep 56 | 1040 | 11 | - 50 |
| 2 | 1f If 11 | 14 Sep 56 | 2153 | 11 | -55 |
| 2 | 11 11 11 | 15 Sep 56 | 0210 | 11 | - 57 |
| 2 | tt 11 II | 15 Sep 56 | 0650 | 11 | -62 |
| 2 | Elk Park, Colo. | 17 Sep 56 | 1305 | 11,750 | -48 |
| 2 | 11 11 11 | 19 Sep 56 | 1.430 | 11 | - 54 |
| 2 | 11 11 11 | 19 Sep 56 | 2058 | 11 | -60 |
| 2 | 11 11 11 | 20 Sep 56 | 0705 | 11 | - 56 |
| 2 | Fort Carson, Colo. | 24 Sep 56 | 1338 | 5,960 | -40 |
| 2 | Peterson Field, Colo. | 26 Sep 56 | 2210 | 6,130 | -144 |
| 3 | Cocoa Beach, Florida | 13 Jun 57 | 0923 to 2310 | 0 | -21 |

Beach, Florida, 13 June 1957, between 0923 and 2310 (an average of three sets of readings). Times listed are local.

These values agree well with the range of values obtained at Flagstaff. It is noted that the temperatures and radiances decrease with increasing altitude. This is expected, since the total mass of air available for radiating is less at the higher altitudes, and at the lower altitudes the warmer surface layer of the atmosphere predominates in determining the sky radiance.

Figures 25 through 33 are radiance plots of clear zenith skies, in the 8 to 14 micron band, copied from the Ohio State University reports. They were selected from the group listed in Table 2 to illustrate the form of the curve and to emphasize the non-blackbodyness of the sky radiation. Two features are of note. One is the ozone band that causes a hump in the curves at 9.6 microns. It is present in all the curves, to different degrees of intensity, although almost masked in the Cocca Beach plot by the warm surface layer of the atmosphere. The other feature is the existence of sharp wings in the curves at 8 and 14 microns. This is interesting because it means that, for a sky of low radiance, most of the energy lies in these wings. If a detecting instrument were used with sensitivity in the 9 to 13 micron band instead of 8 to 14 microns, the apparent sky temperatures would be

considerably lower than those recorded here. The texperatures computed from the curves depend critically on the actual pass band of the instrument.

Another aspect of this extreme non-blackbodiness is the error invited in calculations when blackbody values are used. In emissivity calculations, a factor enters to take into account the fraction of the total radiance or radiant emittance that falls within the spectral band seen by the instrument. If this fraction is taken from the Planck distribution of a blackbody radiator, it will be quite different from that taken from a distribution exemplified in these curves of Figs. 25 through 33, for the Planck distribution is convex upward at these temperatures, whereas these curves are concave.

This error is further compounded by the possible uncertainty of the actual pass band of the instrument. It is customary for manufacturers to specify the limits of a pass band at the half-power points. Unfortunately, with the Barnes portable radiation thermometer, which has a pass band of 8 to 14 microns, the response of the instrument reduces rapidly at the wings of the band at the same wavelengths that the energy from the sky rapidly increases. This makes for difficult calculations and uncertain results.

In the spectral studies of the clear sky made by Ohio State University Research Foundation, measurements were made over the spectral band 2 to 20 microns, at various zenith distances from the zenith to the horizon. It was found that the response gradually changed from a concave curve upward, taken at the zenith, to a convex curve upward approximating a blackbody at the temperature of the atmosphere near the ground, taken at the horizon. At low-altitude locations, this approximation to a blackbody curve was better than at higher altitudes. This is to be expected, because at sea level the spectrometer looks through a large air mass on the horizon which contains a relatively high density of solid aerosol particles whose emission is essentially blackbody radiation. These effects are shown in Figs. 34 and 35.3

The spectral radiance on the horizon at Cocoa Beach is very close to that of a blackbody at the temperature of the atmosphere near the ground, and the envelope of the curves at Elk Fark, Colorado, again approximates that of a blackbody. This feature was used by Ohio State University to make an analysis of a mathematical approximation to the spectral curves at different zenith distances, and will be discussed later. It is significant that not until the zenith distance approaches very near the horizon does the curve approximate closely that of a blackbody. Even at a zenith distance of 88.2 degrees, which is 1.8 degrees above the horizon, the dimple in the spectral curve is appreciable at sea level and is quite large at 11,000 feet altitude. The air mass at this angle is about 20 air mass units at sea level, and is much less at 11,000 feet. It is evident that a very large air mass is necessary for the atmosphere to approximate a blackbody.

Of interest here, it is also significant that within the spectral band 2 to 20 microns it is the central portion between 8 and 14 microns that changes so radically with viewing angle.

These above-described factors lead to the conclusions that the sky temperatures "seen" by the Barnes portable radiation thermometer are never equivalent to the true blackbody temperatures except on the horizon at sea

level, and the deviation from blackbody values is dependent on both altitude of site and viewing angle. Hence, all measured temperatures are called "apparent" temperatures.

Development of a Mathematical Approximation

The aim of the measurements at Flagstaff was to develop a method of obtaining, by simple means, an effective integrated value of temperature, representative of the whole sky in the 8 to 14 micron wavelength band. The approach taken was to develop a mathematical expression for the radiance of the sky, or for the radiant emittance, as a function of zenith distance, and integrate it from the senith to the norizon.

Fortunately, the radiance of the sky in this wavelength band seems to be independent of azimuth, within the error of measurement. This is borne out by the plots of Figs. 1 through 23. The data on these plots include measurements at four different azimuths, and although there were differences in readings from one azimuth to another, no consistent pattern of variation showed up, and the variations were generally small enough to be considered as within experimental error. This conclusion was basically the same as that reached by Ohio State University Research Foundation in their measurements at various altitudes. The independence of radiance with azimuth simplifies the derivation of a mathematical relationship.

Our first attempt to find a mathematical expression for the dependence of sky radiance on zenith distance was the use of an equation for atmospheric transmission developed by R. N. Goody and adapted by Chio State University. Goody's law describes the average transmission of infrared radiation through the atmosphere.

$$\overline{\tau} = \exp \left[-\frac{\Psi \sigma \alpha}{\delta(\alpha^2 + \Psi \sigma \alpha/\pi)^{\frac{1}{2}}} \right]$$

where α is the half-width of the Lorentzian-shaped absorption lines, σ is the mean line strength, δ is the mean line spacing, and v is the mass of the absorber per unit cross-sectional area of the path.

It is known that transmission of sunlight through the atmosphere follows a dependence on the mass of air through which the radiation passes. It would be expected that the variation of radiant emittance, or the variation of radiance, would also follow such a dependence. The standard values for air mass are very closely approximated by the simple expression $\mathbf{w} = \sec \varphi$, where \mathbf{w} is the air mass and φ is the zenith distance. This approximation is good to 0.4 percent for zenith distances up to 65 degrees and falls off to 3 percent at 80 degrees.

E. E. Bell of Ohio State 6 simplified Goody's law by assuming a stratified atmosphere, for which w is proportional to sec ϕ , and assuming that the other quantities are constants. Then the absorptivity, or emissivity, is given by

$$a = \varepsilon = 1 - \tilde{\tau} = 1 - \exp \left[-\frac{\sec \varphi}{(A+B \sec \varphi)^2} \right],$$

where A and B are lumped constants. Bell found, for the Ohio State data in the infrared region, that B >> A, and the equation reduced to

$$= 1 - \exp \left[-C(\sec \varphi)^{\frac{1}{2}}\right],$$

where C is another lumped constant. Bell considered that the sky radiance at zenith distance o is

where X_0 is the blackbody radiance at atmospheric temperature. Bell found that X_0 was satisfactorily approximated by the sky radiance at the horizon, where $\phi = 90$ degrees.

A test of fit of the Ohio State data in the wavelength region 2 to 20 microns showed good agreement when the constant C was approximately 0.4. For one set of data at 4.5 microns, C was 0.44; for another set at 9.3 microns, C was 0.40. The equation fits the data well except at the horizon.

A test was made of the fit of this equation to the data of this report by converting the radiances N and N₀ to equivalent apparent sky temperatures, T and T_H, respectively, where T_H is the apparent sky temperature on the horizon.

$$H = \frac{\sigma^{\frac{1}{1}}}{\pi} = \frac{\sigma^{\frac{1}{1}}}{\pi} \begin{bmatrix} -C(\sec \varphi)^{\frac{1}{2}} \\ 1 - e \end{bmatrix}$$
 for a diffuse sky.

$$T^{\frac{1}{2}} = T_{H}^{\frac{1}{2}} \begin{bmatrix} -C(\sec \phi)^{\frac{1}{2}} \\ 1 - e \end{bmatrix}.$$

Here, σ T^k is the Stephan-Boltzmann expression for blackbody radiant emittance.

The equation did not fit the data well using either value of C--0.44 or 0.40. Deviations were in excess of 3°C over much of the range of zerith distances, and it appeared that choosing a different value for the constant C would only shift the position of the deviations on the curve, and not eliminate them. So this approach was abandoned.

The next approach was to look for an empirical relationship that would fit the data over part of the range of zenith distances and, if necessary, another to fit the remaining part. It was hoped that such expressions could be integrated to calculate the effective whole-sky temperatures, thus avoiding the tedious work of summing all the radiance values (or radiant emittance values) calculated at each zenith distance. However, it turned out that the work of calculating the constants of the empirical equations for each set of data, plus the work of calculating the resultant integral, was more tedious than a summation process. Hence the integral form was used only to verify the accuracy of the summation process. The development of these mathematical relations is given next.

The fundamental physical quantity of a radiating body is radiant emittance, expressed by the Stephan-Boltzmann relation

where W is the rate of energy emitted per unit time from a unit surface area of the source into the whole hemisphere to which it is exposed, T is absolute temperature, and σ is the Stephan-Boltzmann constant. Hence, a fourth-power relationship between sky temperature and zenith distance is sought.

The smoothed data from the temperature curves of Figs. 1 through 23 show that the fourth power of temperature fitted closely a linear relationship with the secent of the zenith distance, which was chosen because of its representation of the air mess.

$$T^{\frac{1}{2}} \times 10^{-9} = \sec \phi \div A, \tag{1}$$

where A is an arbitrary constant.

The radiation seen by the portable radiation thermometer is only that within the spectral band 8 to 14 microns, but the instrument registers the temperature as though it were seeing a blackbody with spectral emittance represented by this amount of energy. Hence we are justified in using, in this analysis, this temperature in its relation to the total radiant emittance.

The constant A can be evaluated by inserting the value of T at the zenith distance 0° , T_{0} . Then,

$$A = T_0^{4} \times 10^{-9} - 1.$$

ŕ

The total radiant emittance of a sky with an apparent temperature T is

$$W = \sigma T^{\frac{1}{4}} = \sigma \left[T_{C_i}^{\frac{1}{4}} + 10^9 \text{ (sec } \varphi - 1) \right]. \tag{2}$$

The constant A is obviously different for each sky scan having a different apparent zenith temperature.

Equation (2) fits the data of almost all elevation scans of temperature with an accuracy of $\pm \frac{1}{2}$ °C through zenith distances 0° through 60°. There are a few exceptions, but they are small enough to be included in the errors of measurement. For smooth data, this accuracy is correct. The relation deviates rapidly from this accuracy at zenith distances greater than 60 degrees, partly because the expression sec φ no longer holds accurately for the value of air mass.

In an attempt to find a relation to express the radiant emittance at zenith distances greater than 60 degrees, an exponential form was used. A three-constant equation was found to be necessary to meet the requirements.

$$T^{\downarrow} = a e^{b\phi} + c, \tag{3}$$

where T is absolute temperature, ϕ is zenith distance in radians, and a, b, and c are constants.

This equation fits the data of two of the smooth-valued test runs in the zenith distance range 60 to 90 degrees, with an accuracy of ±2°C. The tediousness of calculating temperatures with this equation discouraged our using it for more than two sets of data. But it was decided that if the equation fit the data closely enough, and if the integration of radiances with this equation agreed with the summation technique closely enough, then the summation technique would be considered valid and would be used for all other data.

The irradiance of energy from the whole sky on a horizontal surface of the earth is sought. Consider an element of area da, of the sky, taken normal to the direction of the earth, radiating as a lambertian radiator, i.e., a diffuse source, for which the cosine law holds. In Fig. 36 the energy from this source strikes an element of area dae of the earth's surface that is exposed to the whole hemisphere of the sky. R is the distance between the source and receiver elements. ϕ is the zenith distance, the angle between the direction of R and the normal to the receiver element.

The radiance from dA_3 , considering it as a blackbody, is N_8 watt cm⁻² ster⁻¹, and the radiant intensity J_5 is N_8dA_8 watt ster⁻¹. The radiant power striking dA_8 is

$$P_{Ae} = N_s dA_s \times (\frac{dA_e}{R^2} \cos \varphi),$$

where the expression in parentheses is the solid angle subtended by $d\mathbb{A}_{e}$ from $d\mathbb{A}_{n}$.

For this Lambertian source, the relation between radiance and radiant emittance is

$$N_S = \frac{1}{\pi} W_{Sf}$$

where $W_{\rm g}$ is the total radiation power emitted from a unit area of the source into the whole hemisphere. The factor π enters here rather than 2π because the radiance is defined in terms of radiation in a direction normal to the emitting surface. If the radiance multiplied by the cosine of the angle to the normal is integrated over the whole hemisphere, the resultant quantity, the radiant emittance, is equal to π times the radiance. Then,

$$P_{Ae} = \frac{1}{\pi R^2} W_s dA_s dA_e \cos \varphi$$

The infrared energy rate received by the portable radiation thermometer from the clear sky was found to be independent of azimuth. Since the instrument records the radiation as though the source were a blackbody, the analysis is carried out in blackbody fashion with this assumption of azimuth independence.

The radiation power from a spherical band, described by the element dA_{S} , at the radius R, is

$$P_{Be} = \int_{Band} \frac{1}{\pi R^2} W_S dA_S dA_e \cos \varphi$$

$$= \frac{\cos \varphi}{\pi R^2} W_S dA_e \int_{Band} dA_S$$

$$= \frac{1}{\pi R^2} W_S dA_e \cos \varphi (2\pi \times Rd\varphi)$$

$$= W_S dA_e \sin 2\varphi d\varphi$$

The irradiance from the band on dae is

$$H_B = \frac{P_{B_e}}{dA_e} = W_S \sin 2\phi d\phi = \sigma T_S^{\frac{1}{2}} \sin 2\phi d\phi$$
 watt $c = 2$.

The irradiance from the total hemisphere of the sky is

$$H = \int_0^{\pi/2} \sigma T_S^{\frac{1}{2}} \sin 2\phi \, d\phi \text{ watt cm}^{-2}$$
.

Since the aim is to determine the "effective" temperature of the whole sky as the instrument sees it, "effective" is defined. It is the temperature that the instrument would see if the energy were distributed uniformly throughout the hemisphere.

If T_s is uniform, then the irradiance is

$$H_u = \sigma T_S^{\mu} \int_0^{\pi/2} \sin 2\phi d\phi$$

$$H_{11} = \sigma T_{S}^{4} = W_{S,2} \tag{5}$$

where the subscript u refers to a uniform sky. This states that the irradiance on a small surface element enclosed in a hemispherical blackbody radiating uniformly is the same as the radiant emittance of the blackbody. Hence, using this one-to-one relationship between irradiance on the receiver and effective radiant emittance of the sky, it can be said that the effective radiant emittance for any kind of sky is

eff
$$W_s = H = \int_0^{\pi/2} \sigma T_s^{\frac{1}{4}} \sin 2\varphi \, d\varphi = \sigma T_s^{\frac{1}{4}}.$$
 (6)

The effective sky temperature is then

$$eff T_S = (\frac{1}{\sigma} eff W_s)^{1/4}. \tag{7}$$

To obtain the total irradiance from the whole hemisphere, Eq. 6 is integrated in two parts, one covering zenith distances 0 to 60 degrees, the

other covering zenith distances 60 to 90 degrees. Equations (2) and (3) are used, inserted into equation (6).

eff
$$W_s = H = \int_0^{\pi/3} \left[\sigma T_c^4 \div 10^9 \sigma \text{ (sec } \phi - 1) \right] \sin 2\phi \, d\phi$$

$$+ \int \frac{1/2}{\pi/3} \sigma \left(a e^{b\phi} + c \right) \sin 2\phi \, d\phi \qquad (8)$$

This can be integrated, and reduces to

eff
$$W_s = \frac{3}{h} \sigma T_o^{\frac{1}{h}} + \frac{1}{h} \sigma \times 10^9 +$$

$$\frac{\sigma a}{h^2 + h} \left[2e^{b\pi/2} - e^{b\pi/3} (\frac{b/3}{2} + 1) \right] + \frac{1}{4} \sigma c.$$
 (9)

Here, σ is the Stefan-Boltzmann constant, T_0 is the apparent sky temperature at 0-degree zenith distance, and a, b, and c are constants determined from the data of a set of measurements.

This equation was used to calculate the effective radiant emittance of the sky and the effective whole-sky temperature, $T_{eff} = (\frac{1}{\sigma} \text{ eff W}_g)^{1/4}$, for the data of 27 and 28 July 1964.

A summation process was also made of the same data, using 18 equally spaced segments of zenith distance (from 0 to 90 degrees) to obtain the same effective radiant emittances and effective whole-sky temperatures. From the geometry of Fig. 36, the solid angle of the spherical band as seen by the element of earth's surface da, is

$$\Omega_{\rm Rend} = 2\pi (\cos \varphi_1 - \cos \varphi_2),$$

where ϕ_1 and ϕ_2 are the zenith distances of the edges of the band. If we let $\phi_A = \frac{\phi_1 + \phi_2}{2}$ and $\Delta \phi = \phi_2 - \phi_1$, this converts to

 $\Omega_{\rm Band} = A_{\pi} \sin \phi_{\rm A} \sin \frac{\Delta \phi}{2}$. If $\Delta \phi < 8$ degrees, we can approximate

 $\sin \frac{\Delta \phi}{2} = \frac{\Delta \phi}{2}$ with an error of less than 0.1 percent. Since these data were taken in steps of 5-degree intervals of zenith distance, we can use the approximation. Then,

$$\Omega_{\rm Band} = 2\pi \sin \varphi_{\rm A} \Delta \varphi$$

In a manner analogous to the development of the integral expression, it can be stated that the irradiance on the elemental surface of the earth $dA_{\rm e}$ from the spherical band is

 $H_{Band} = N_{Band} \Omega_{Band} \cos \varphi_A$,

where $N_{\rm Band}$ = average radiance across the band = $\frac{W_{\rm A}}{\pi} = \frac{1}{\pi} \sigma T_{\rm A}^{\ 4}$, cos $\phi_{\rm A}$ is the factor due to Lambert's law, and $T_{\rm A}$ is the average temperature across the band.

$$H_{\text{Band}} = \frac{W_{A}}{\pi} 2\pi \sin \varphi_{A} \cos \varphi_{A} \Delta \varphi$$

$$= 2 \sigma T_{A}^{4} \sin \varphi_{A} \cos \varphi_{A} \Delta \varphi.$$

Since T and cos ϕ are both nonlinear functions, the question arises as to the proper values to choose for the respective "average" values, T_A and cos ϕ_A . However, for simplicity it is assumed that the band interval $\Delta \phi$ is small enough so that the midpoints of these variables may be used. Then cos ϕ_A and $\sin \phi_B$ refer to the same angle. Then

$$H_{\text{Band}} = \sigma T_A^{\frac{1}{4}} \sin 2\varphi_A \Delta \varphi. \tag{10}$$

Summing this over all values of zenith distances gives, in exact analogy to the integral expression of equation (6),

eff
$$W_{\rm S} = H = \sum_{\rm O} \sigma T_{\rm A}^{l_{\rm I}} \sin 2\phi_{\rm A} \Delta \phi$$
. (11)

This equation was used on the data of 27 and 28 July 1964 to determine

 $T_{eff} = (\frac{1}{\sigma} eff W_s)^{1/4}$. The results agreed with those of the integral equation to better than $\frac{1}{2}$ °C. With this verification, the summation equation (11) was assumed valid, and it was used on the rest of the data.

Effective Whole-Sky Temperatures

اغ ال The results of the calculations on effective whole-sky temperatures are given in Table 1. The last column gives the zenith distance at which the apparent sky temperature is the same value as the effective whole-sky temperature. The values in this last column are surprisingly constant at 54 degrees zenith distance, which attests to the consistency of the form of the curve over all times of day and night. This fact enables the evolvement of a much simpler method of obtaining reliable measurements of effective whole-sky temperature. A single measurement of apparent sky temperature at a zenith distance of 54 degrees is all that is needed, at least hypothetically. The reliability of such a technique should be held with reservations, especially when the measurements are extrapolated to all seasons of the year and other locations at different altitudes. But if high accuracy is not required, the gain in speed and simplicity makes this technique worth while.

By the same token, a linear relationship between effective whole-sky temperature and apparent sky temperature would be expected at the zenith. Such a relationship does exist in our data, as shown in the plot of Fig. 37, but it is not as definite a relationship as might be desired.

The calculations of effective whole-sky temperatures revealed the fact that the energy coming from the extremes of zenith distances—that is, at the zenith and at the horizon—contribute almost negligibly to the whole-sky temperature. At the zenith it is because of the cold temperature and

rarefied atmosphere. At the horizon it is because of the cosine factor of Lambert's law.

SUMMARY

A portable radiation thermometer, made by Barnes Engineering Company, was used to measure apparent sky temperatures during July and August 1964 at Flagstaff, Arizona, at an altitude of 7000 feet. The two-degree field of view permitted point measurements at selected zenith distances from the zenith to the horizon, which were then used in a summation equation to obtain effective whole-sky temperatures.

The sensitivity of the instrument is in the 8- to 14-micron band, so the temperatures measured were not blackbody temperatures, nor even "true" sky temperatures. This was seen clearly in the spectral curves of sky radiance obtained by Ohio State University Research Foundation in measurements made over a period of time at different locations and at altitudes from sea level to 14,000 feet. These spectral curves show sharp "wings" in each case at about 8 and 14 microns, featuring very rapid changes of response at these points. Because of this the apparent sky temperature indicated by the Barnes instrument is critically dependent on the pass band of its filters. This is not a criticism of the instrument, since it was designed to measure temperatures of warmer surfaces such as the earth and bodies of water, which approximate blackbodies. But it does indicate precautions in using the instrument for this purpose.

All the measurements indicate that the apparent sky temperature at any zenith distance is not dependent on azimuth, but does vary with time of day. In general it follows the warming of the atmosphere by the sun. The plots of apparent sky temperature as a function of zenith distance were quite smooth and consistent, and it was found that the sky repeats itself thermally to such an extent that a plot of temperatures is duplicated reliably by any plot at another time or another day if the zenith temperature is the same.

Apparent zenith temperatures of clear skies were obtained for altitudes from sea level to 14,000 feet by integration of the Ohio State University curves. These temperatures ranged from -21°C to -82°C, and are generally consistent with the temperatures found at Flagstaff, which ranged from -34°C to -62½°C.

The summation equation used to compute the effective whole-sky temperatures was found, by comparison with an integral equation, to fit the data from Flagstaff to within $\frac{1}{2}$ °C. Being much simpler and faster to use, it was used in preference to the integral equation.

It was found that the effective whole-sky temperature was consistently the same value as the apparent sky temperature at a zenith distance of 54 degrees. This fact can simplify data-taking considerably.

The program of sky-temperature measurements was part of a program of measuring the emissivity of soil surfaces, for which the sky temperature is needed. The program of measuring the emissivity of soil surfaces will be covered in a separate report.

REFERENCES

- 1. Bell, E. E., Infrared Techniques and Measurements, Ohio State Univ. Res. Found., Interim Eng. Rpt No. 1, 20 Jan 56, Contr. AF 33(616)-3312.
- 2. Bell, E. E., Atlas of Sky and Terrain Infrared Measurements Program, Colorado Springs Region, 1956, OSURF, Int. Eng. Rpt No. 5, 20 Jun 57, Contr. AF 33(616)-3312.
- 3. Bell, E. E., I. L. Eisner, J. B. Young, A. Abolins, and R. A. Oetjen, Infrared Techniques and Measurements, OSURF Final Eng. Rpt, Oct 1957, Contr. AF 33(616)-3312.
- 4. Goody, R. N., Quart. J. Roy. Met. Soc., 78, 165, 1952.
- 5. Smithsonian Meteorological Tables
- 6. Eell, E. E., Infrared Techniques and Measurements, OSURF Int. Eng. Rpt No. 3, 27 Nov 56, Contr. AF 33(616)-3312.

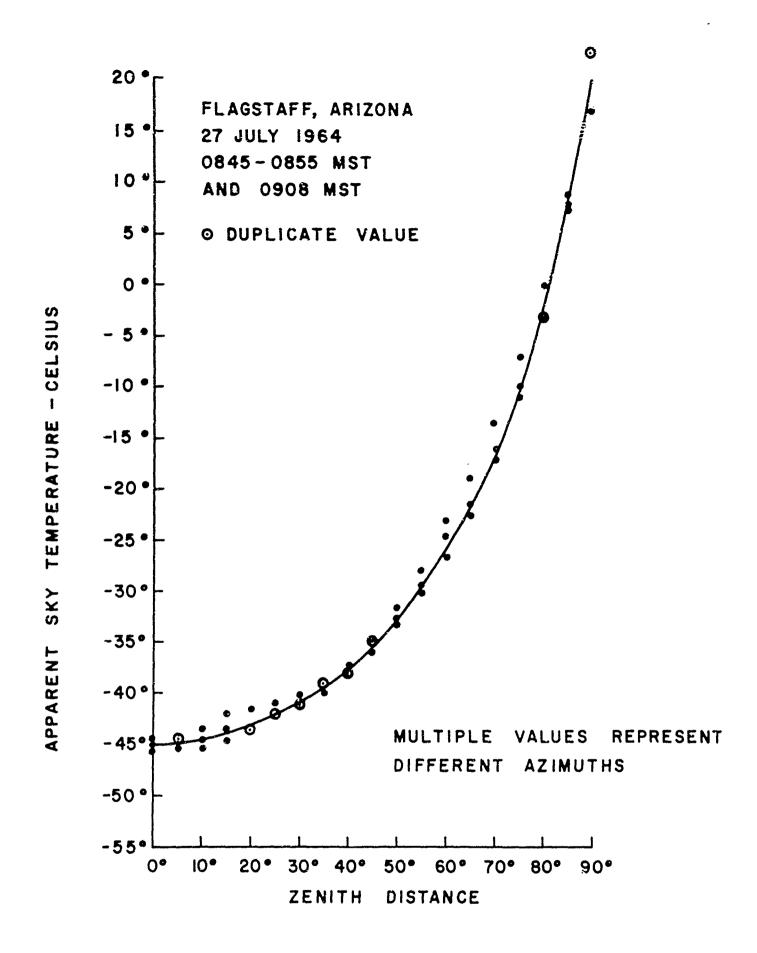


FIG. I APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

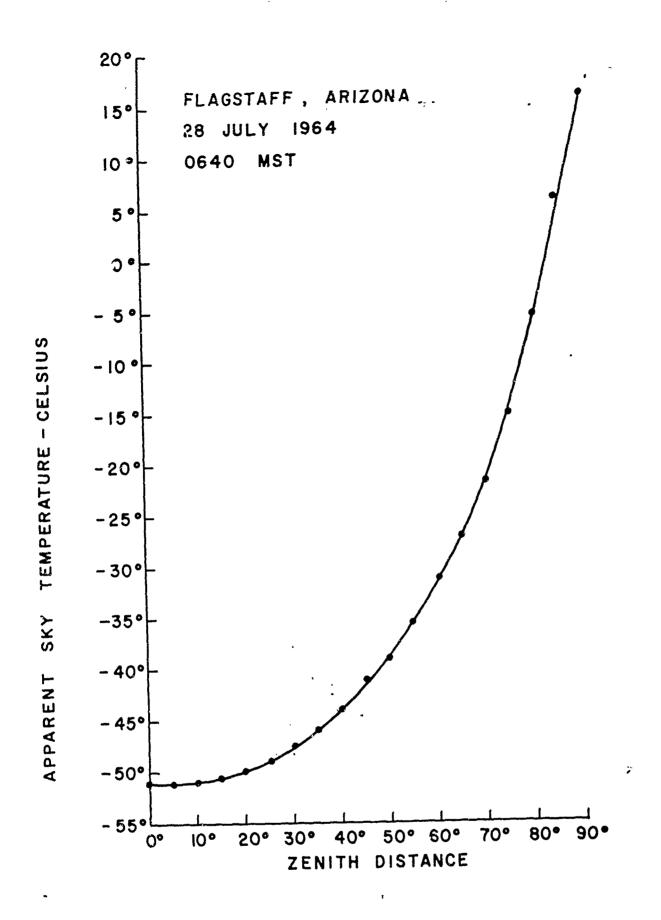


FIG. 2 APPARENT SKY TEMPERATURE WITH INFRARED
THERMOMETER

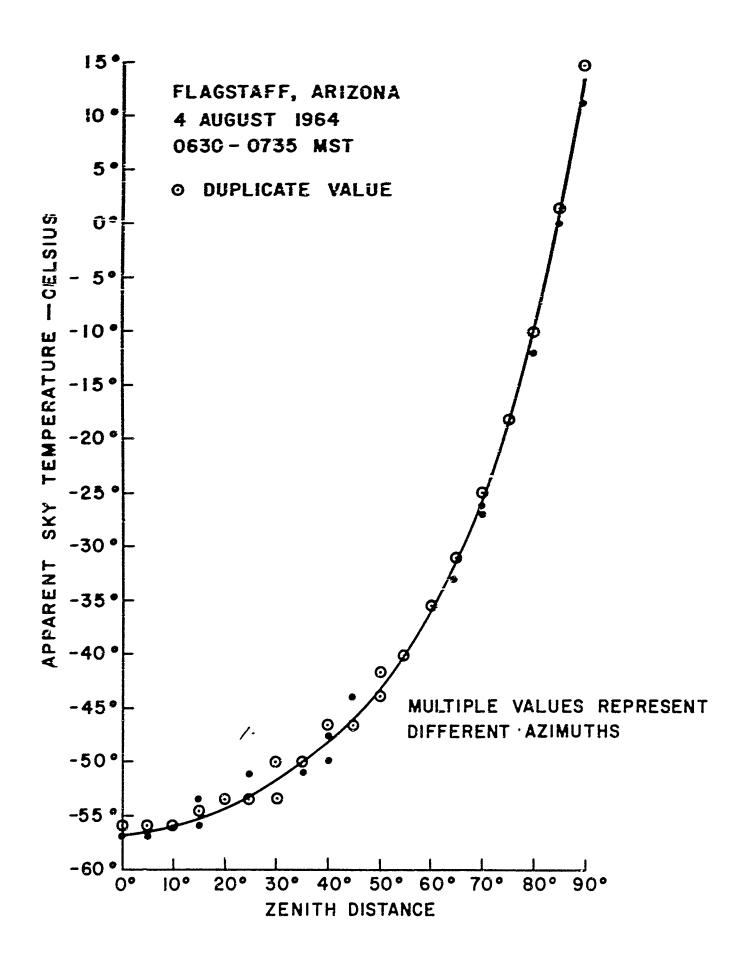


FIG 3 APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

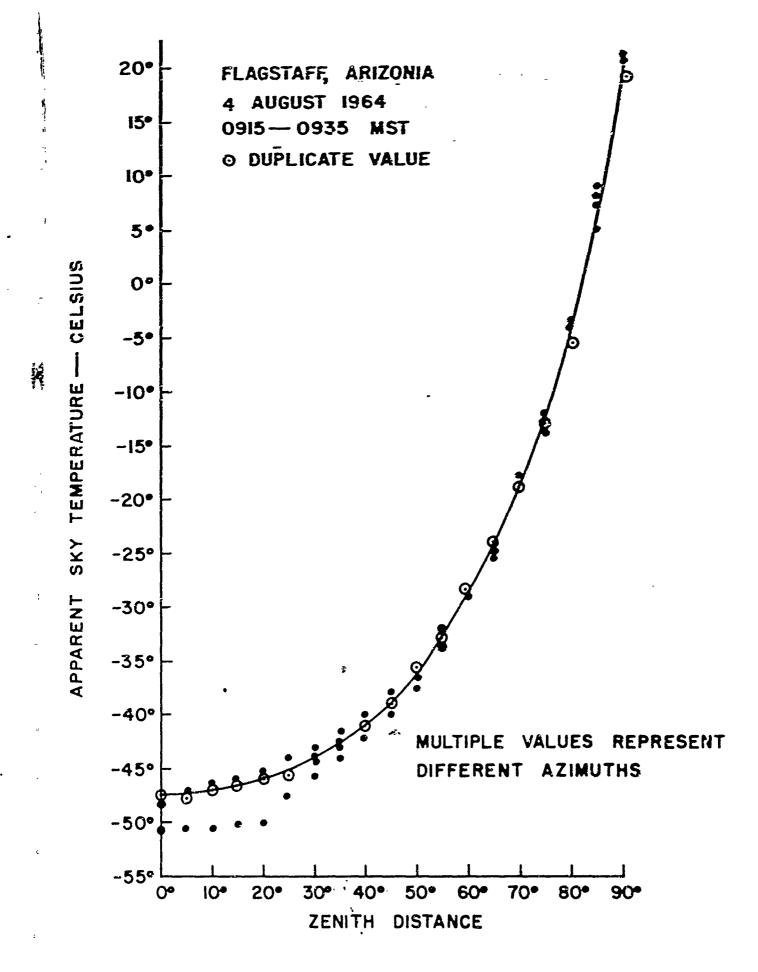


FIG. 4 APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

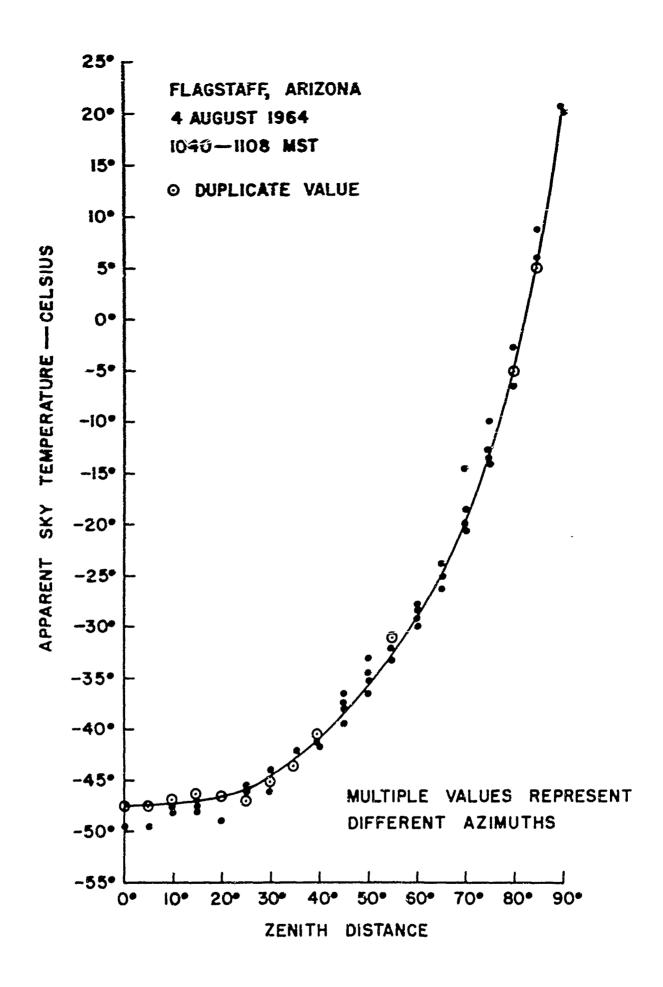


FIG. 5 APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

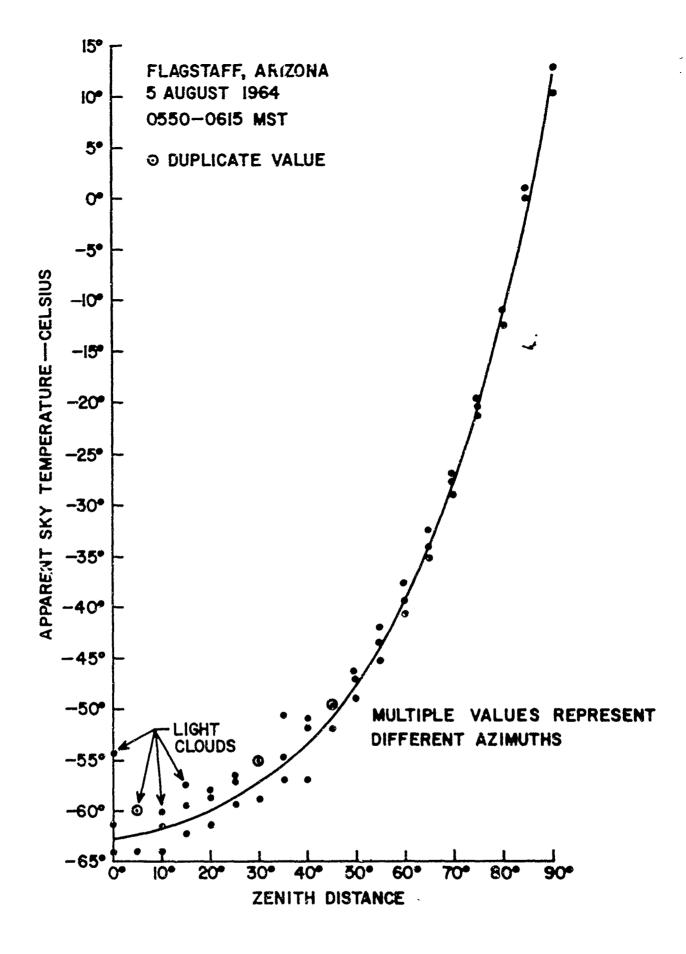


FIG 6 APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

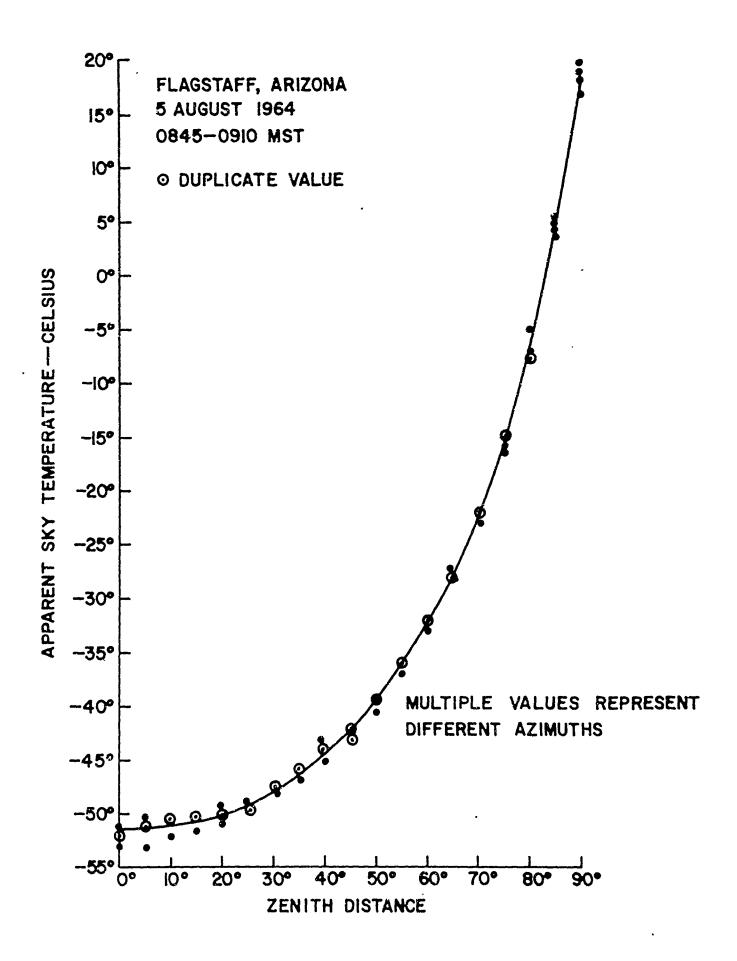


FIG 7 APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

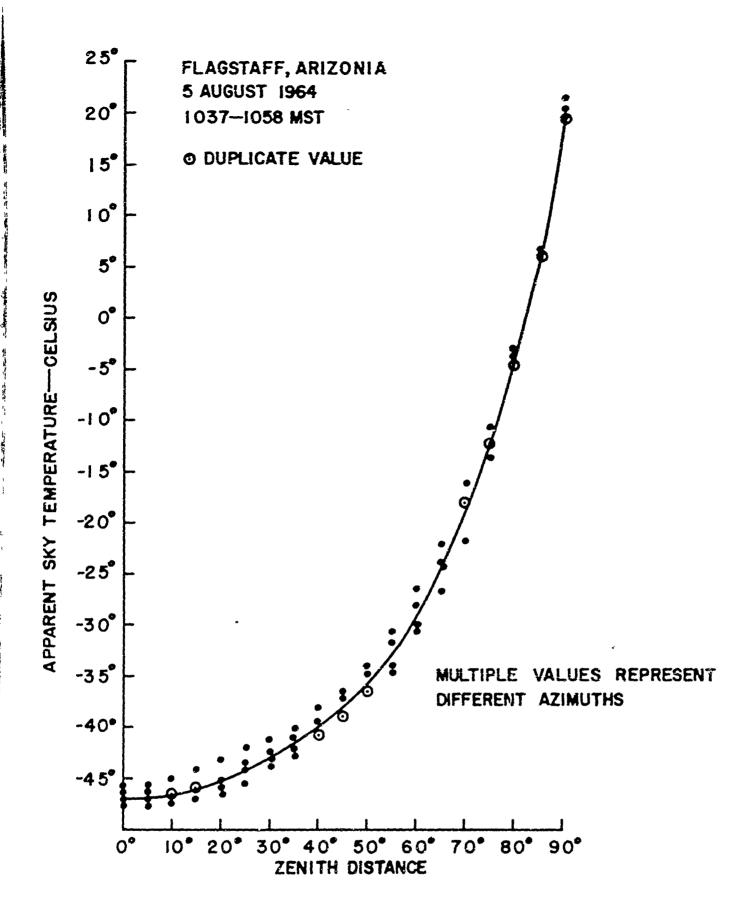


FIG 8 APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

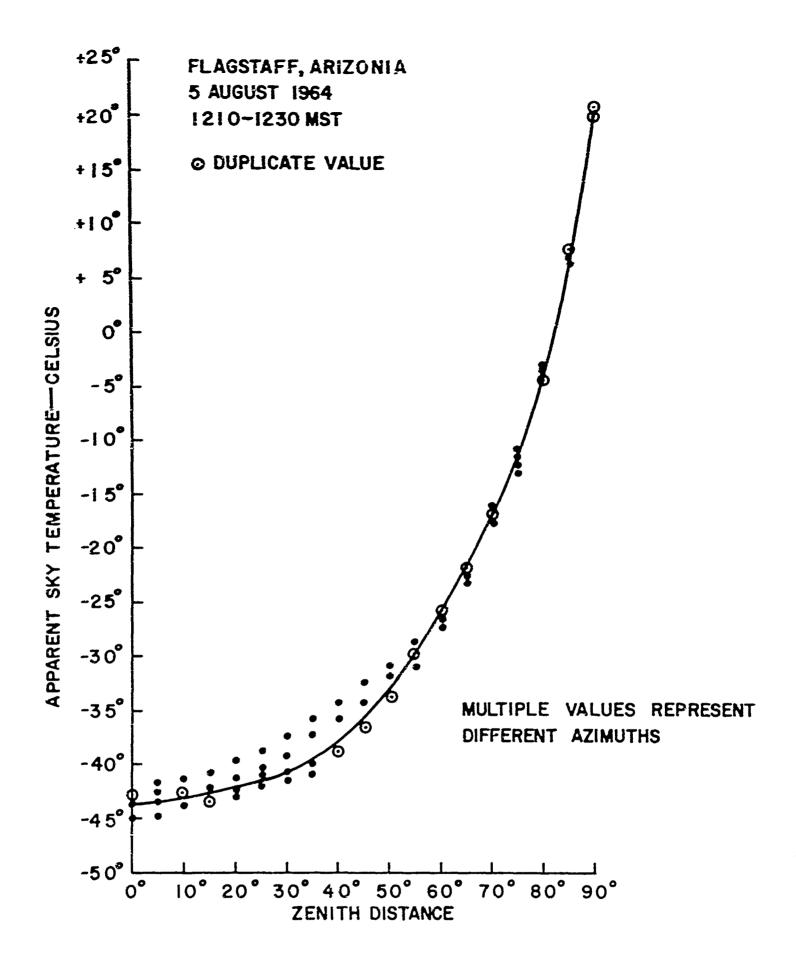


FIG 9 APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

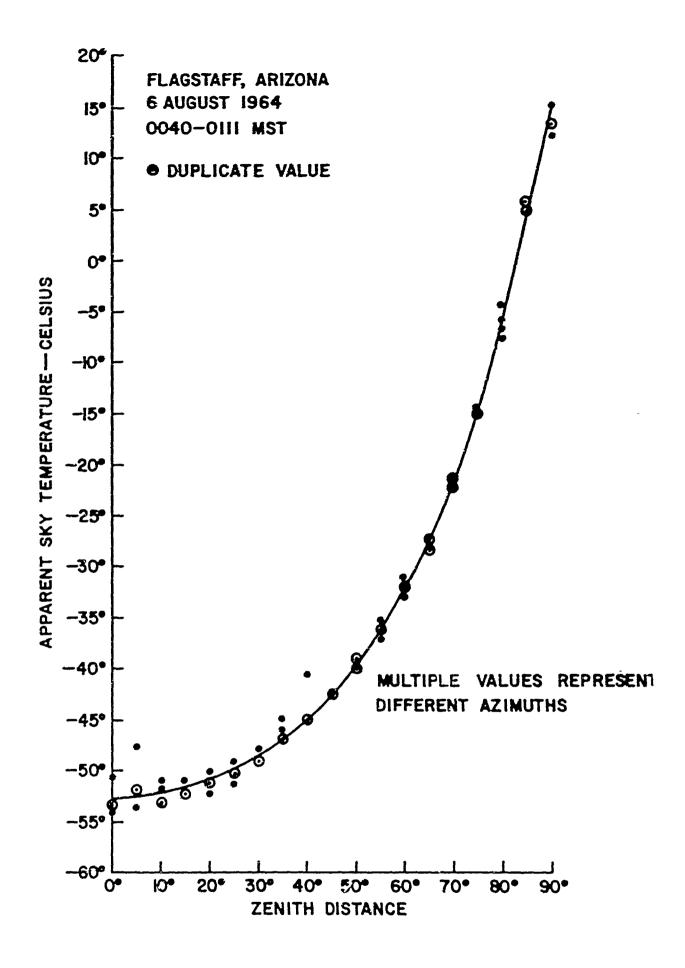


FIG IO APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

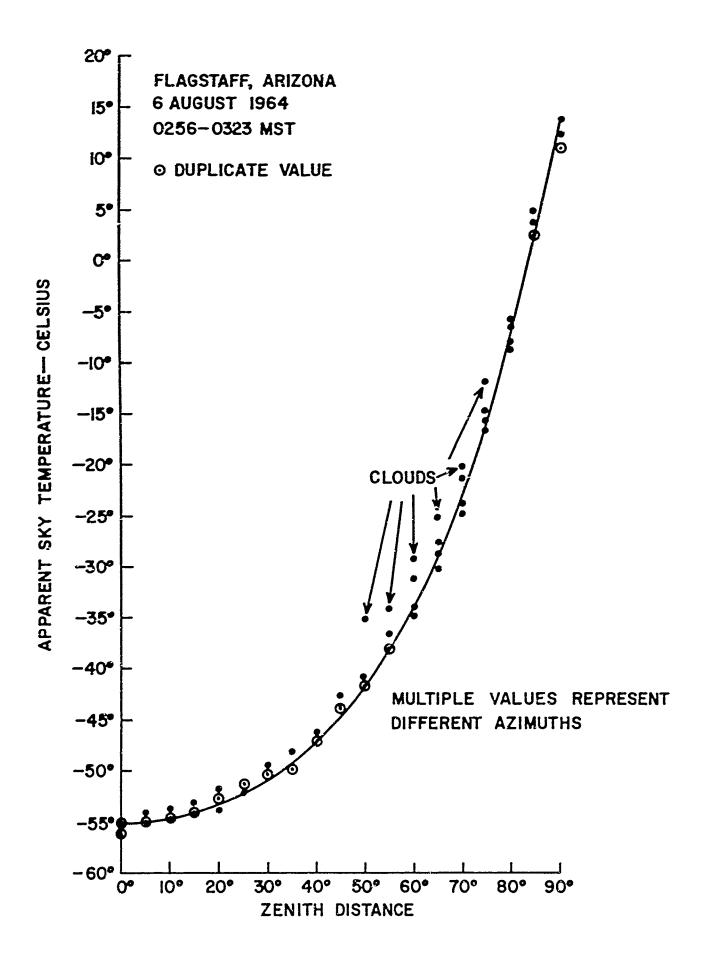


FIG II APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

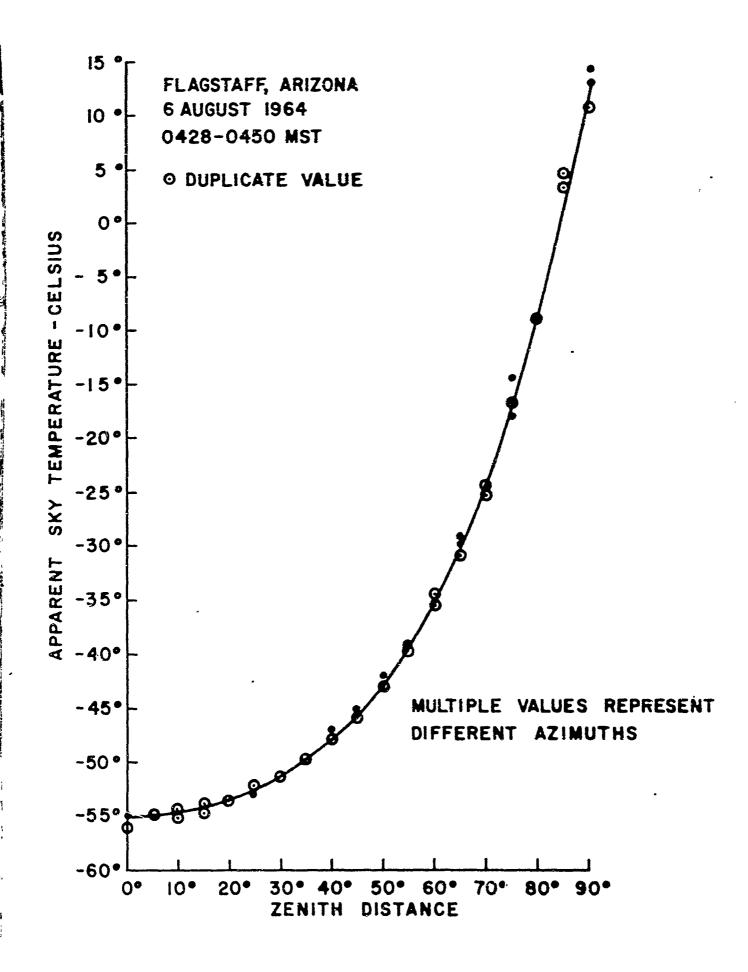


FIG. 12 APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

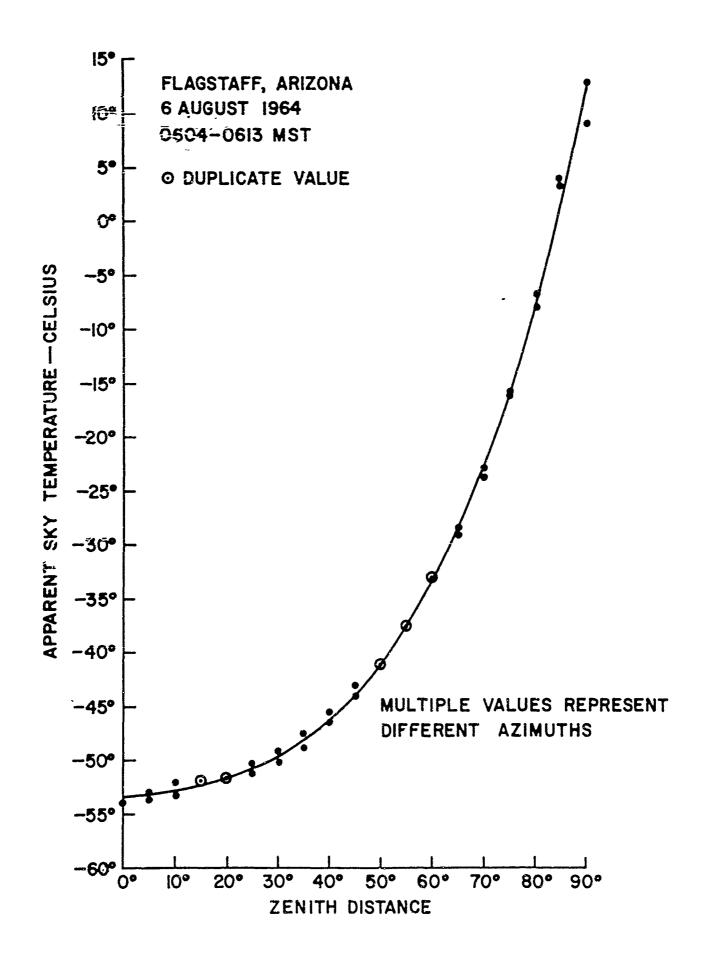


FIG 13 APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

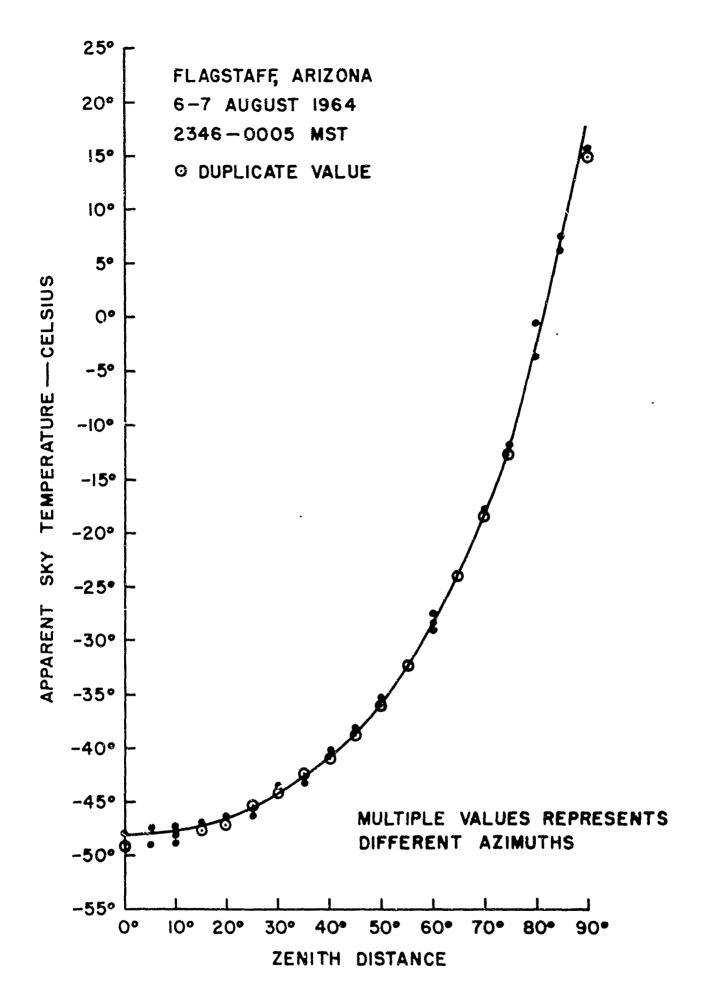


FIG.14 APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

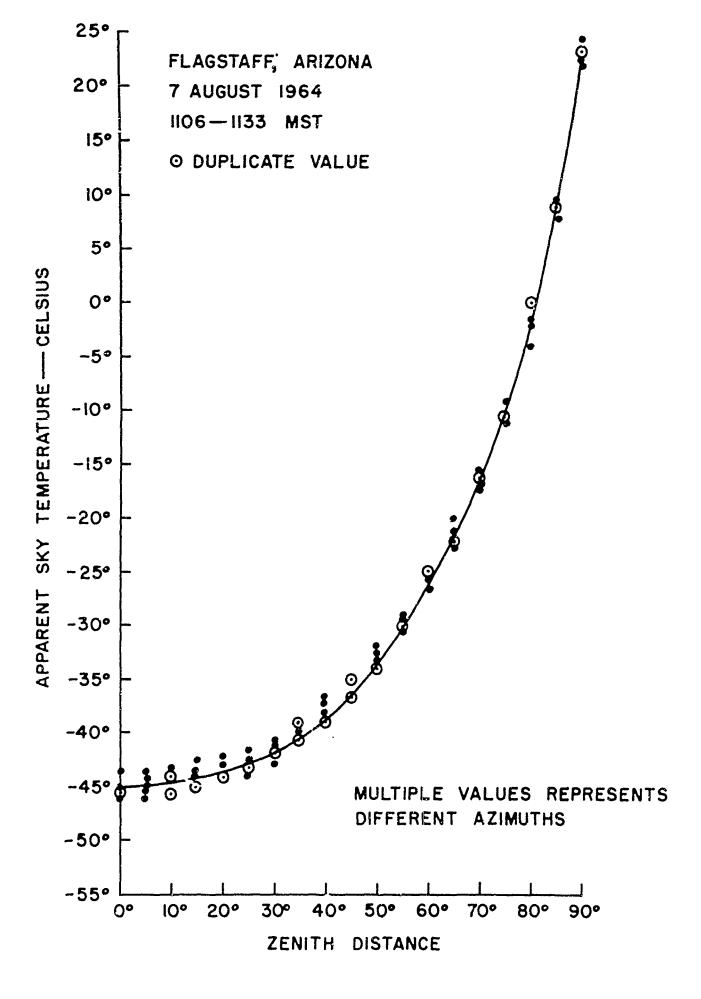


FIG. 15 APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

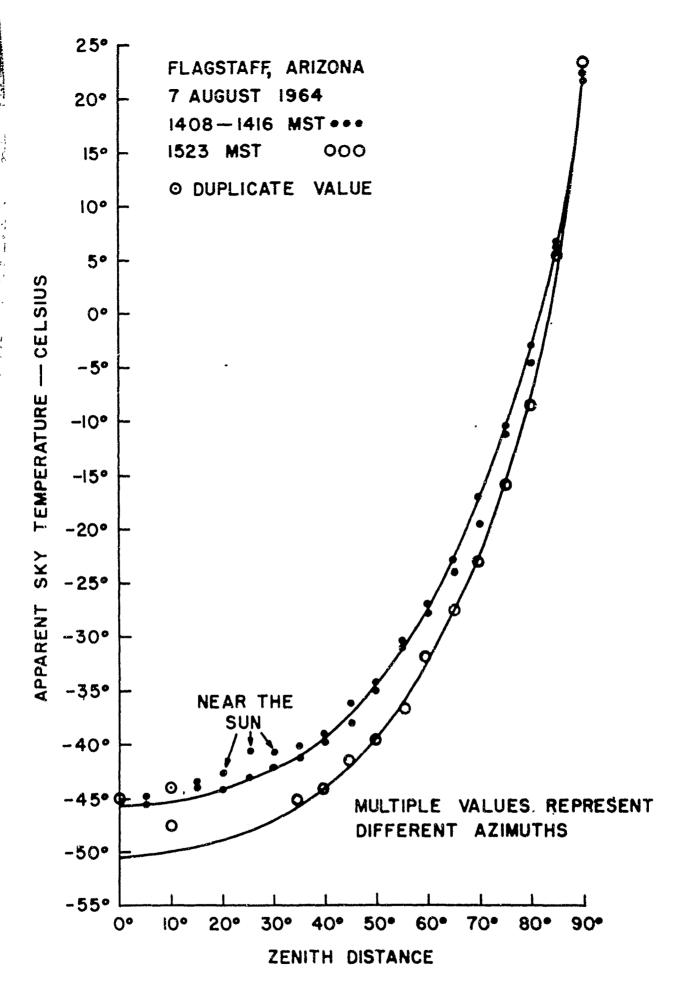


FIG. 16 APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

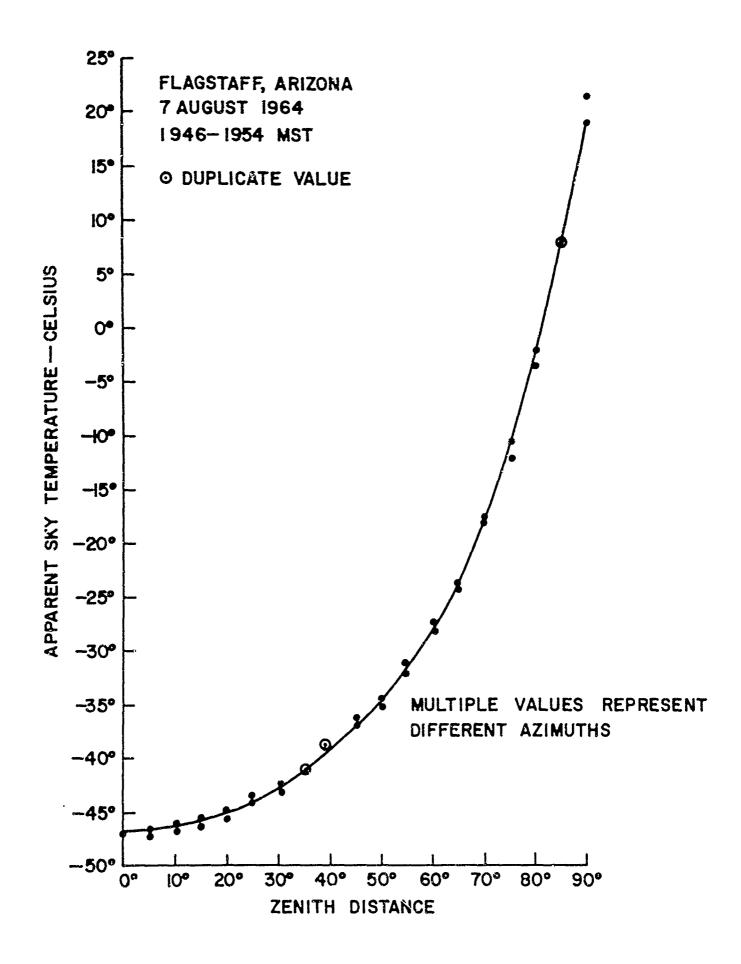


FIG 17 APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

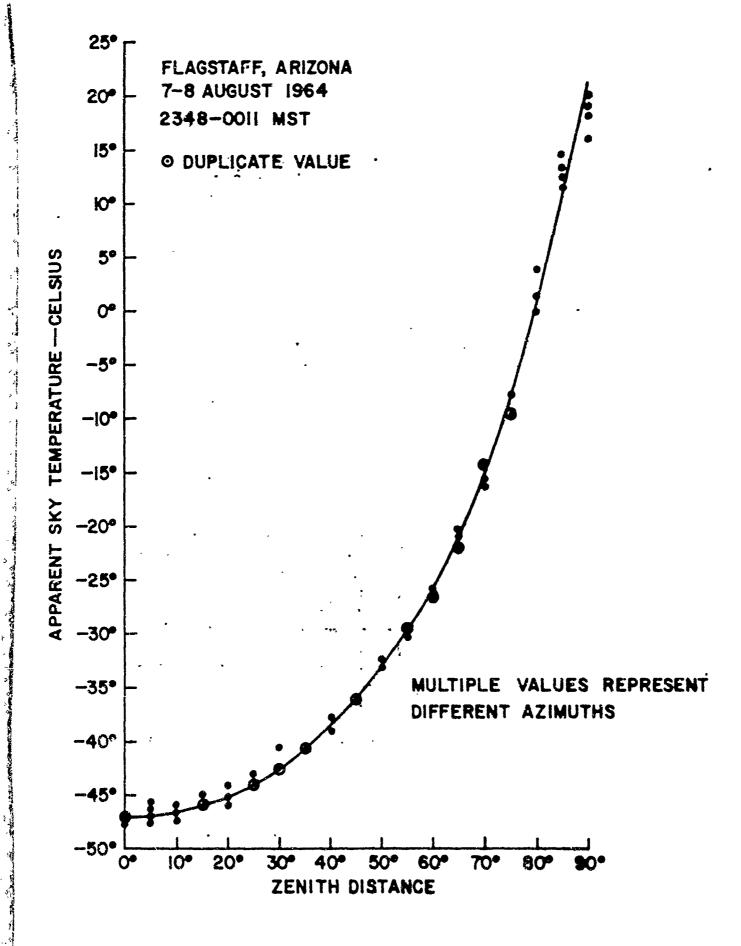


FIG 18 APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

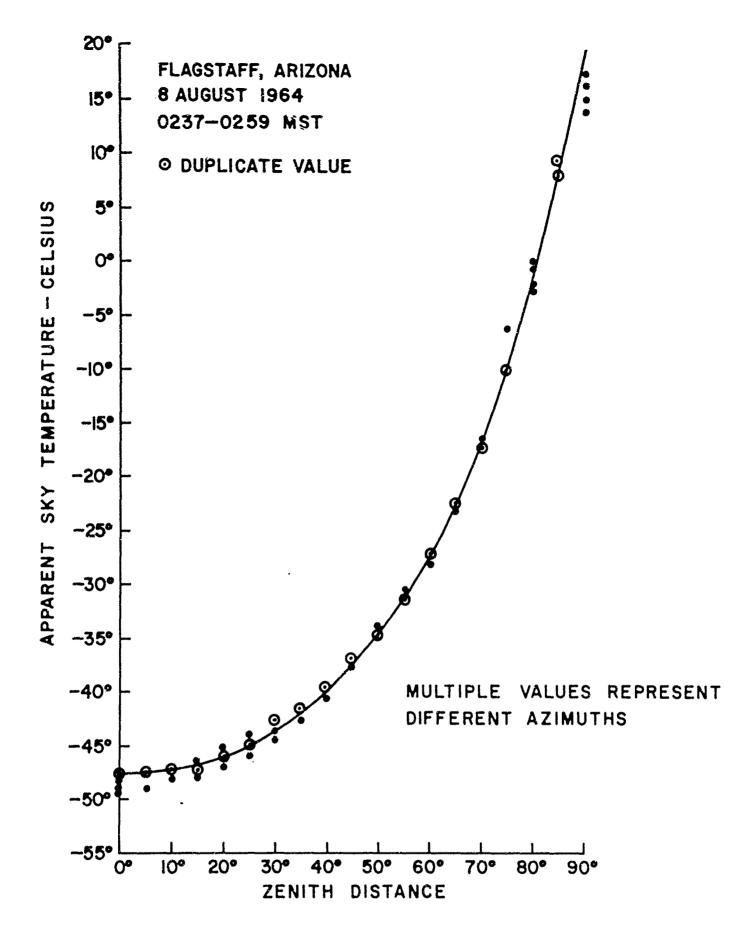


FIG. 19 APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

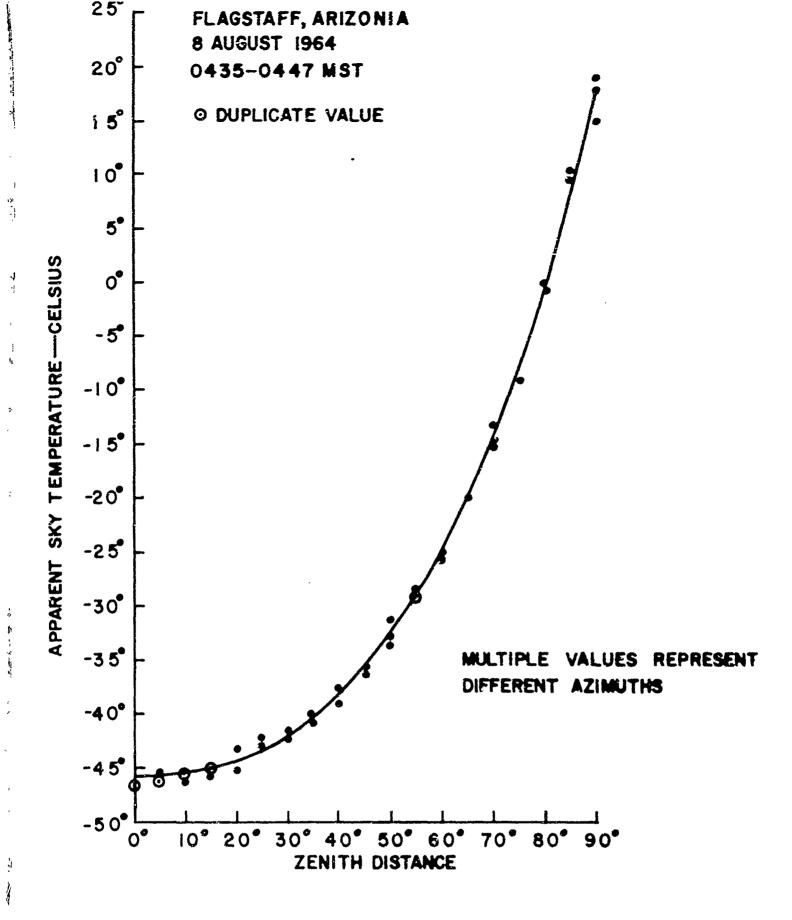


FIG 20 APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

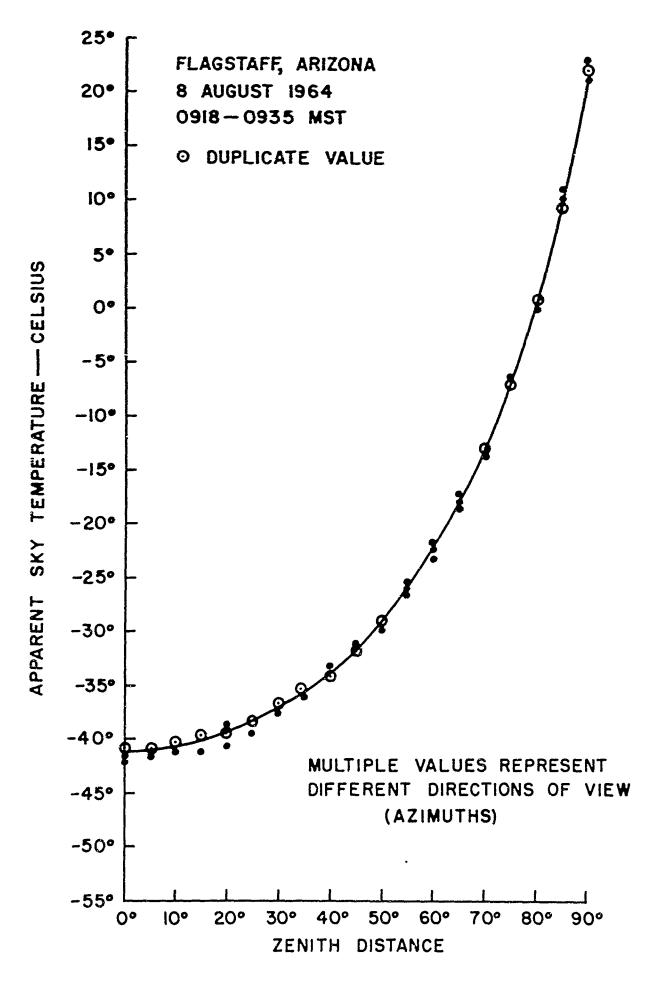


FIG. 21 APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

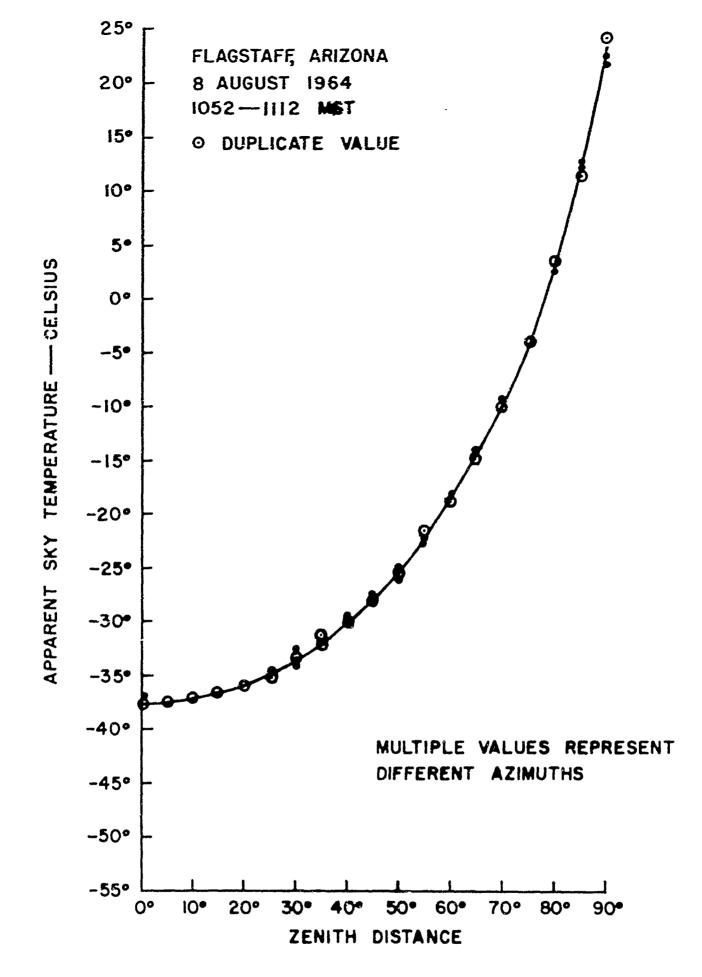


FIG. 22 APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER


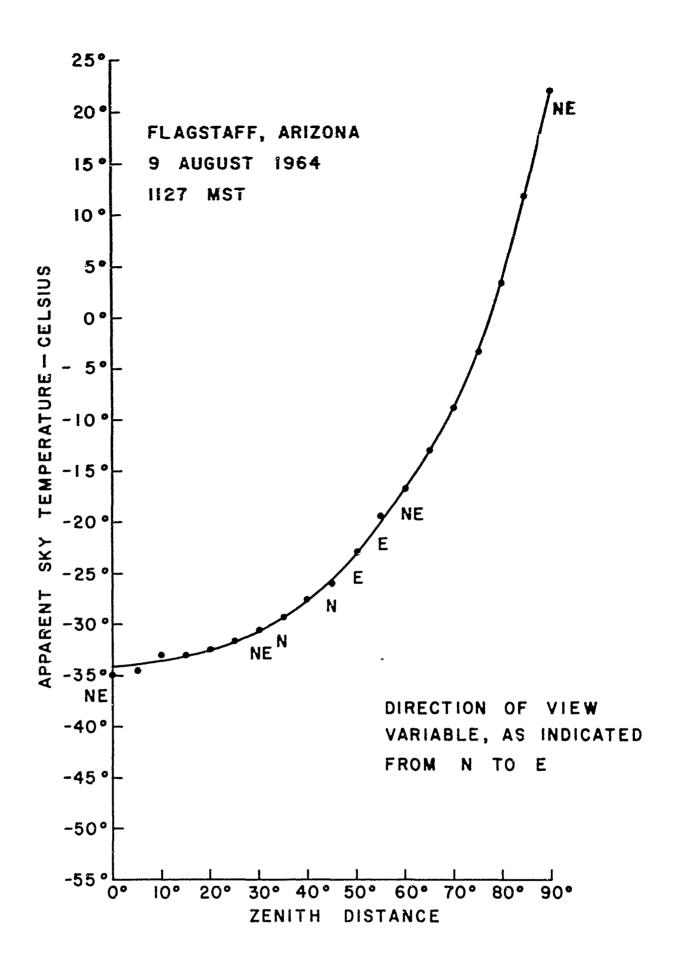


FIG. 23 APPARENT SKY TEMPERATURE WITH INFRARED THERMOMETER

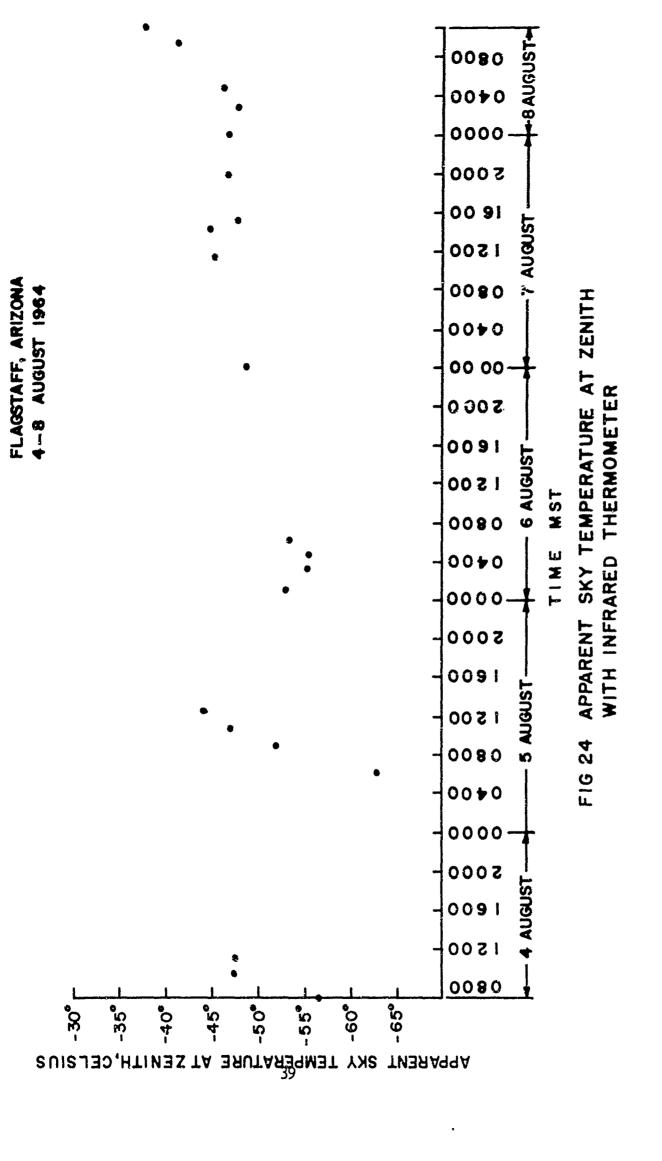

The state of the s


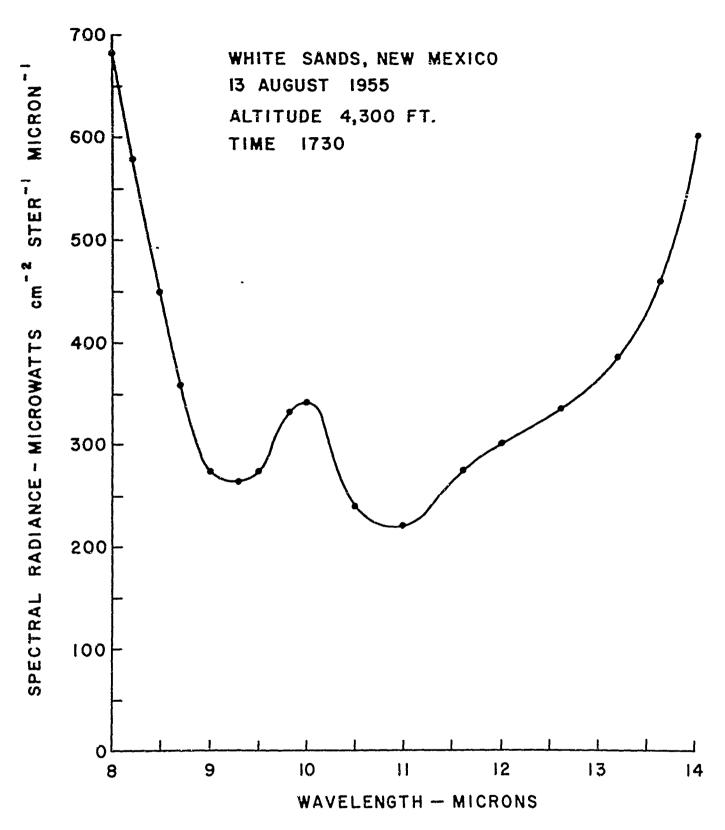


FIG. 25 CLEAR ZENITH SKY SPECTRAL RADIANCE

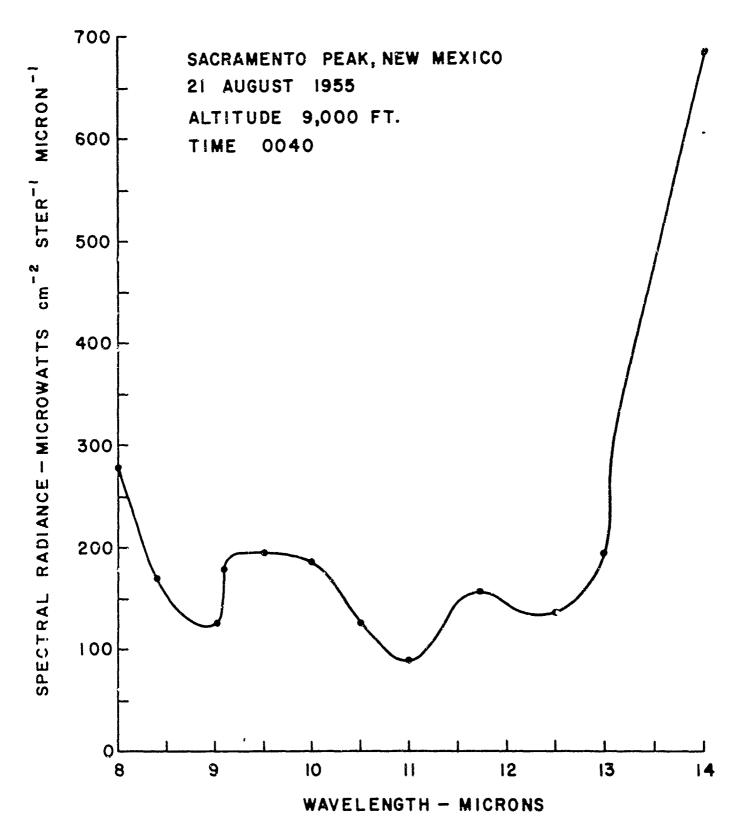

The state of the s

THE SECOND SECON

FIG. 26 CLEAR ZENITH SKY SPECTRAL RADIANCE

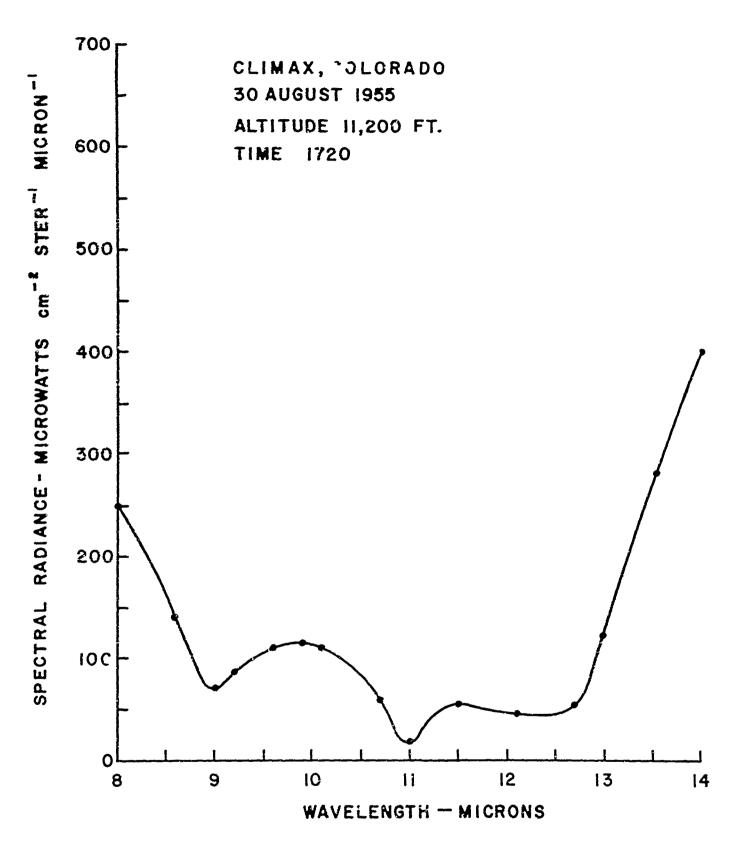


FIG. 27 CLEAR ZENITH SKY SPECTRAL RADIANCE

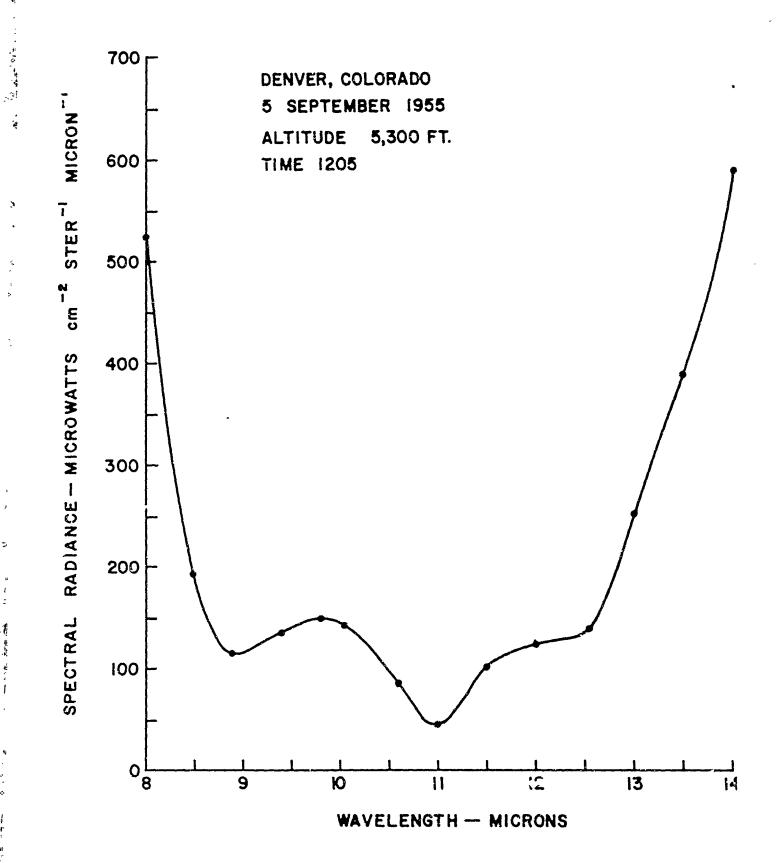


FIG 28 CLEAR ZENITH SKY SPECTRAL RADIANCE

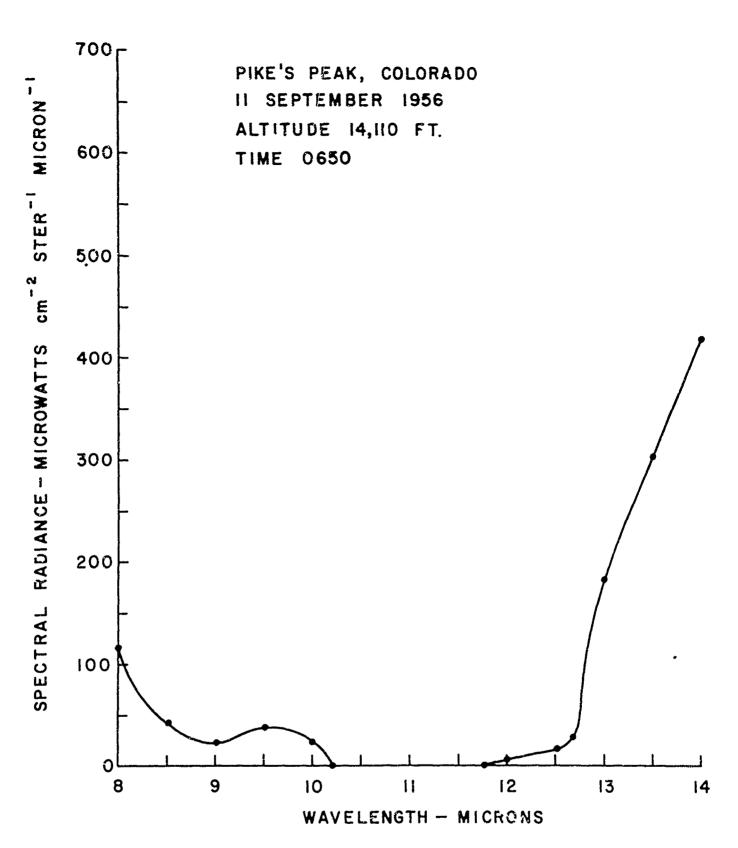


FIG. 29 CLEAR ZENITH SKY SPECTRAL RADIANCE

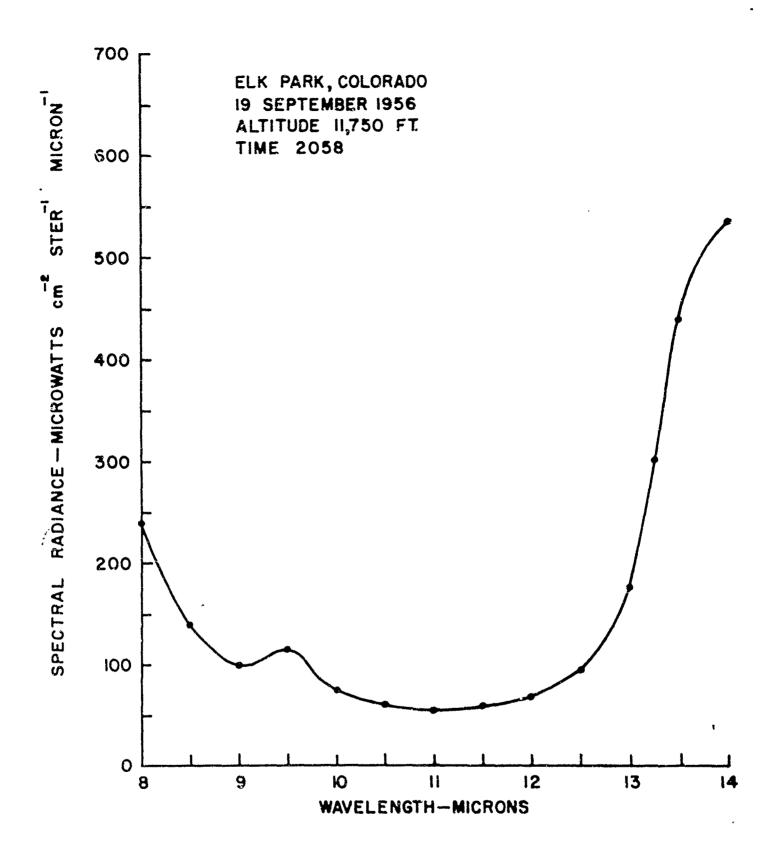


FIG. 30 CLEAR ZENITH SKY SPECTRAL RADIANCE

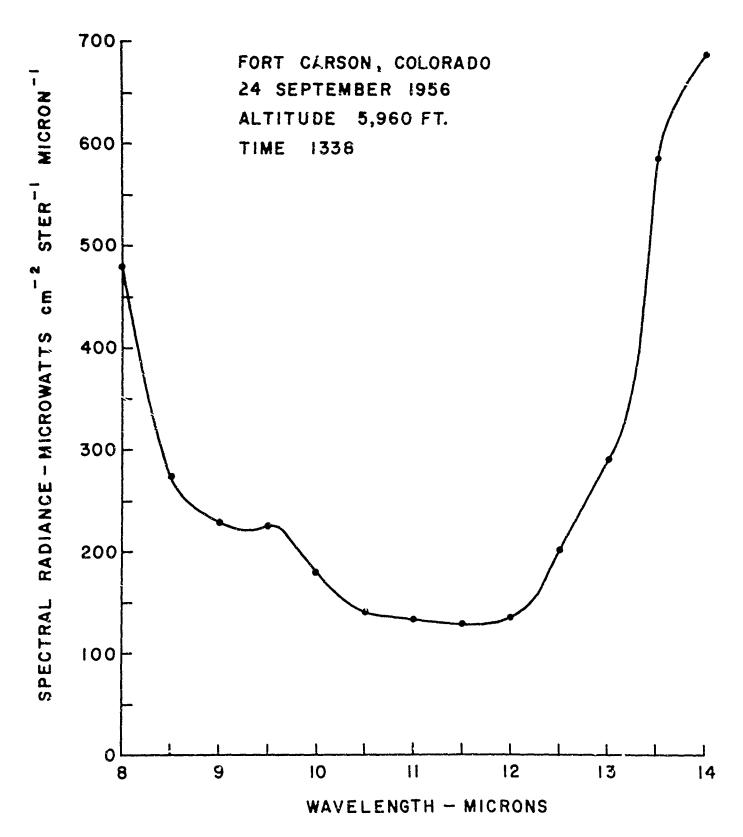


FIG. 31 CLEAR ZENITH SKY SPECTRAL RADIANCE

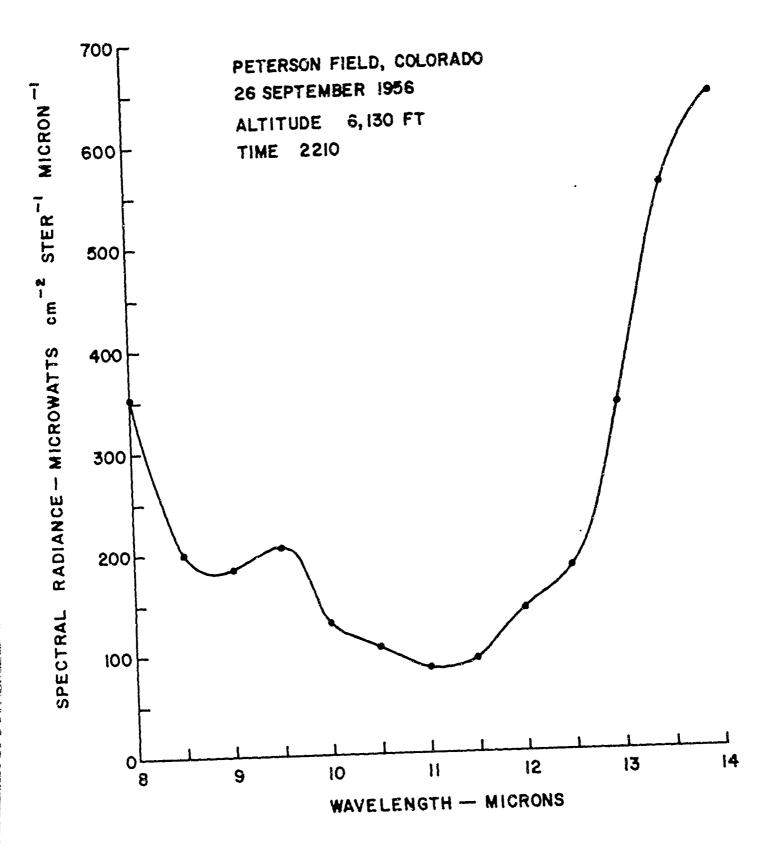


FIG 32 CLEAR ZENITH SKY SPECTRAL RADIANCE


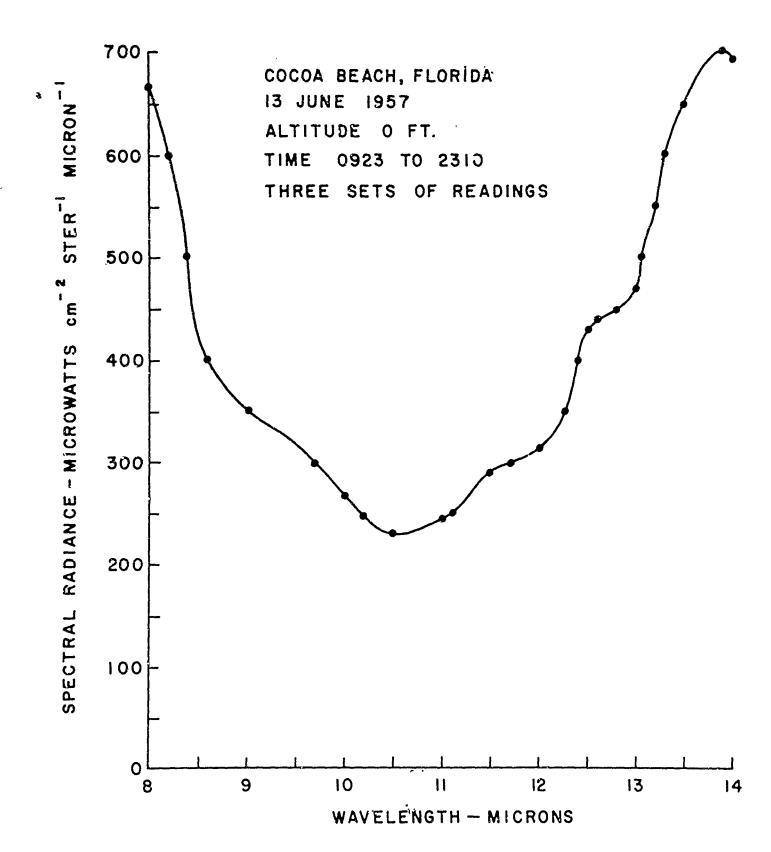


FIG. 33 CLEAR ZENITH SKY SPECTRAL RADIANCE

SEPT. 1956, AT NIGHT ELK PARK, COLORADO:

0°, 88.2°, 90° ZENITH DISTANCES:

AIR TEMP: 8°C ELEVATION: 11,750 FT.

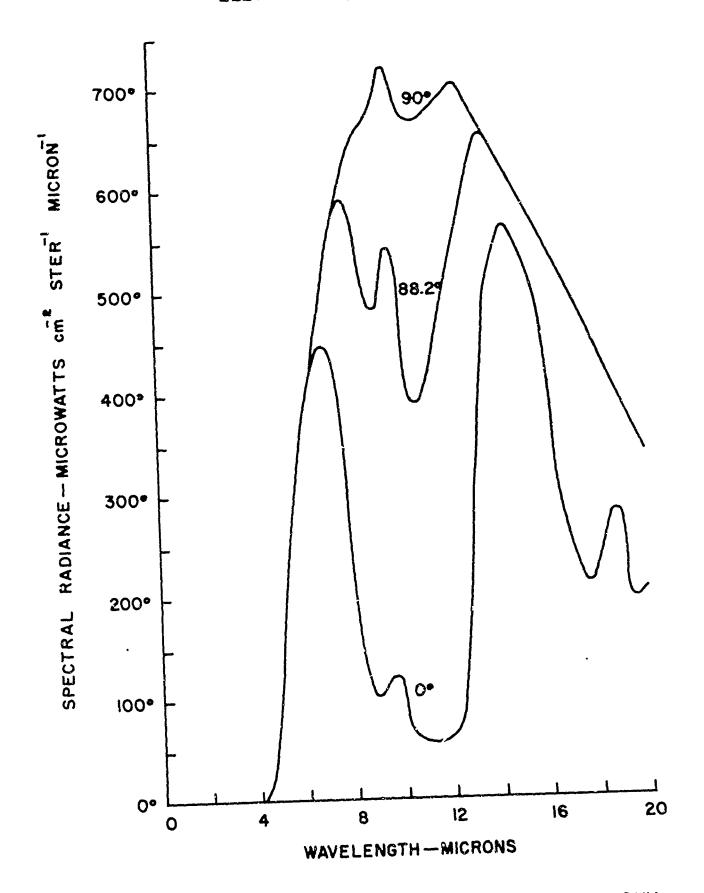

Ď

ij _ 7

FIG. 34 SPECTRAL RADIANCE OF CLEAR SKY 49

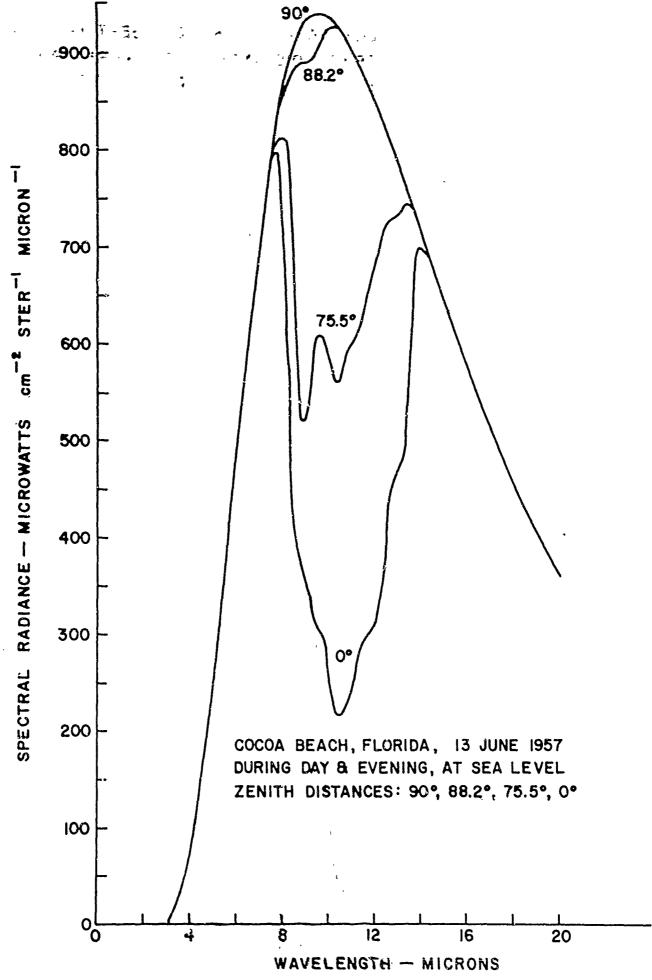


FIG 35 SPECTRAL RADIANCE OF CLEAR SKY

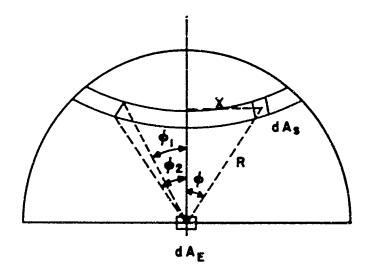


FIG. 36 GEOMETRY FOR DETERMINING RADIATION FROM THE SKY THAT REACHES AN ELEMENT OF THE EARTH'S SURFACE.

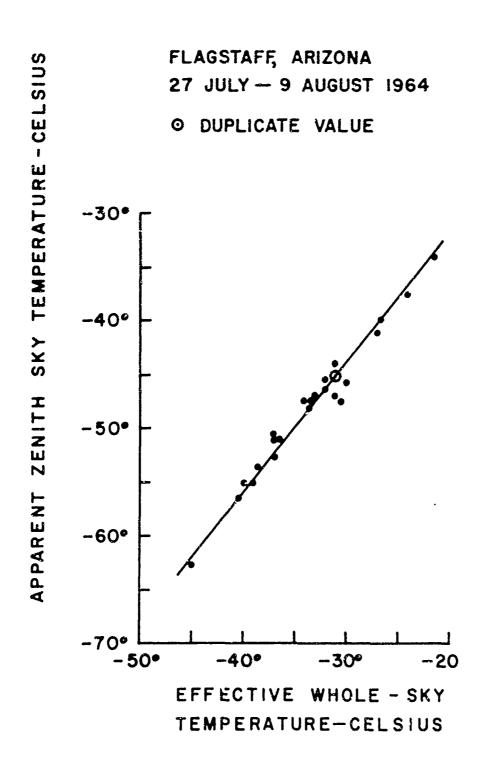


FIG. 37 EFFECTIVE WHOLE-SKY TEMPERATURE WITH INFRARED THERMOMETER

FEEL SELECTION OF THE PROPERTY OF THE PROPERTY

| Security Classification | | | | | |
|---|--------------------------|------------------------------------|------------------------------------|--|--|
| | NTROL DATA - R&C | | the execute connect to classified? | | |
| (Security classification of title, body of abstract and indexis 1 ORIGINATING ACTIVITY (Corporate author) | ng annotation must be on | | RY SECURITY CLASSIFICATION | | |
| · · · | | UNCLASSIFIED | | | |
| U. S. Army Electronics Command | | | | | |
| Fort Monmouth, New Jersey | | 25 GROUP | , | | |
| 3. REPORT TITLE | | | • | | |
| EFFECTIVE CLEAR SKY TEMPERATURES IN THE | 8- TO 14-MICRO | N BAND | | | |
| | | | } | | |
| 4. DESCRIPTIVE HOTES (Type of report and inclusive dates) Technical Report | | | | | |
| 5 AUTHOR(S) (Last name, lirst name, initial) | • | | | | |
| Tebo, A. R. | | | | | |
| 6. REPORT DATE | 74. TOTAL HO, OF PA | GES | 76. NO. OF REFS | | |
| May 1965 | 52 | 1 | 6 | | |
| SE. CONTRACT OR GRANT NO. | 9. ORIGINATOR'S RE | PORT NUM | BER(S) | | |
| | | | | | |
| ь риојест но. 1V0-14501-B-53A | ECOM-2592 | | | | |
| c. Task No13 | SE OTHER REPORT N | other numbers that may be assigned | | | |
| <u>-</u> | вна мропу | | | | |
| d. 10. AVAILABILITY/LIMITATION NOTICES | L | | | | |
| | | L A.a 1 | ~~~ | | |
| Qualified requesters may obtain copies This report has been released to CFSTI | | ; Irom 1 | | | |
| 11 SUPPLEMENTARY HOTES | 12. SPONSORING MILIT | - | | | |
| | • | | Labs., AMSEL-RD-SMA | | |
| | U.S.Army Elect | | | | |
| · | Fort Monmouth | <u>, N. J.</u> | 07703 | | |
| 13. ABSTRACT | _ | _ | | | |
| Apparent sky temperatures were measures | | • | | | |
| period in July and August of 1964 at Fla | | | | | |
| with a two-degree field of view, sensing | | | | | |
| was used to read sky temperatures at 5-6 | | | | | |
| from the zenith to the horizon. These summed over the whole sky, to arrive at | | | | | |
| • • | | - | | | |
| The apparent sky temperature at any | | | | | |
| muth, but does vary with the time of day | | | | | |
| given time is duplicated by that of an e | | | | | |
| zenith temperatures are the same. The | effective whole | -sky ter | sperature is consist- | | |
| ently the same value as the apparent sky | | | | | |
| 54 degrees. Methematical equations were | | | | | |
| dependence of radiance or apparent sky | | | | | |
| Graphs of the spectral radiance of | the class sent | th elec | Obtained from a | | |
| report by Ohio State University Research | | | | | |
| 8 to 14 microns to arrive at apparent ze | | | | | |
| tudes from sea level to 14,000 feet. The | | | | | |
| cudes from sea fever to 14,000 feet. If | sese ranged tro | E -21 C | w =52 C. | | |
| | | | | | |
| | | | | | |
| | | | | | |

| 14. KEY WOR'S | | LINK A | | LINK 8 | | LINK C | |
|--------------------------|----|--------|----|--------|----|--------|----|
| | | ROLE | WT | ROLE | WT | HOLE | WT |
| l'emperature | ĺ | | | | | . * | |
| Atmospheric , emperature | | 1 | * | | | | |
| Intrerec | | | | | 1 | | • |
| Radiometry | į. | | | | | | |
| Sky radianes | İ | | | | | | |
| | - | ļ | | ' | | | |
| | | | | | | | |
| | Ì | | | | | | |
| | İ | | | | | | |
| | İ | | | | | | |
| | 1 | | | | | | |
| | | | | | | • | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

INSTRUCTIONS

- 2 ORIGINATING ACTIVITY: Enter the name and address of the confractor, subcontractor, grantee, Department of Defense activity of other organization (corporate author) issuing the report.
- 2" "PORT" CURTY CLASSIFICATION: Enter the overall accounty, a sification of the report. Indicate whether "Restricted Lata" is included. Marking is to be in accordance with appropriate security regulations.
- 2b. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.
- 3. REPORT TITLE: Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.
- 4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.
- 5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter last name; first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.
- 6. REPORT DATE: Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.
- 7a. .TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.
- 7b. NUMBER OF REFERENCES: Enter the total number of references cited in the report.
- 8a. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.
- 8b, &c, & 8d. PROJECT NUMBER. Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.
- 9a. ORIGINATOR'S RÉPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.
- 9b. OTHER REPORT NUMBER(S): If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

- 10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:
 - (1) "Qualified requesters may obtain copies of this report from DDC."
 - (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
 - (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through
 - (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through
 - (5) "All distribution of this report is controlled. Qualified DDC users shall request through

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

- 11. SUPPLEMENTARY NOTES: Use for additional explanatory notes.
- 12. SPONSORING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring (paying far) the research and development. Include address.
- 13. ABSTRACT. Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

. It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. KEY WORDS. Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no necurity classification is required. Idenfiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.